

Noise Exposure Contours for Stansted Airport 2022

ERCD REPORT 2303



Published by the Civil Aviation Authority, 2023

Aviation House, Beehive Ring Road, Crawley, West Sussex, RH6 0YR

You can copy and use this text but please ensure you always use the most up to date version and use it in context so as not to be misleading, and credit the CAA.

Population data used in this report are based on 2011 Census data (updated for 2022) supplied by CACI Limited.

© CACI Ltd 2022 All Rights Reserved.

Noise sensitive building data are from PointX © Database Right/Copyright, 118 Data Resources © Database Right/Copyright, The Local Data Company © Database Right/Copyright, Vocallink Limited © Database Right/Copyright and Ordnance Survey © Copyright and/or Database Right. All rights reserved. Licence number 10034829

Enquiries regarding the content of this publication should be addressed to: Environmental Research and Consultancy Department, Civil Aviation Authority, 5th Floor, 11 Westferry Circus, London E14 4HE

Contents

Contents	3
Summary	5
Chapter 1	7
Introduction	7
Background	7
Stansted Airport	8
Chapter 2	10
Noise modelling methodology	10
ANCON model	10
Radar data	10
Flight tracks	10
Flight profiles	11
Noise emissions	12
Daytime traffic by ANCON type	13
Night-time traffic by ANCON type	14
Daytime traffic distributions by NPR/SID route	14
Night-time traffic distributions by NPR/SID route	14
Runway modal splits	15
Topography	16
Population and 'Points of Interest' databases	16
Chapter 3	18
Results	18
2022 day actual $L_{Aeq,16h}$ contours	18
2022 night actual $L_{Aeq,8h}$ contours	20
2022 day standard $L_{Aeq,16h}$ contours	21
2022 night standard $L_{Aeq,8h}$ contours	23
2022 day actual $L_{Aeq,16h}$ contours – comparison with 2021	24
2022 night actual $L_{Aeq,8h}$ contours – comparison with 2021	25

2022 day standard $L_{Aeq,16h}$ contours – comparison with 2021	26
2022 night standard $L_{Aeq,8h}$ contours – comparison with 2021	27
Daytime $L_{Aeq,16h}$ noise contour historical trend	28
Supplementary noise metric – N65 day contours	30
Chapter 4	33
Conclusions	33
References	34
Figures	35
Tables	58
ANCON type descriptions	63
Glossary	67

Summary

1. This report presents the 2022 average summer day and night noise exposure contours generated for London Stansted Airport. The contours in 2022 reflected the ongoing recovery of international air travel from the response to the COVID-19 pandemic.
2. The noise modelling used radar and noise data from Stansted's Noise and Track Keeping (NTK) system. Mean flight tracks and lateral dispersions for each route, and average flight profiles of aircraft height, speed and thrust for each aircraft type, were calculated using these data.
3. Aircraft movements at Stansted recovered significantly in 2022 from the previous year. Average daily movements for the 2022 summer 16-hour daytime period (467.9) were 67% higher than the previous year (2021: 280.1). The B738 ANCON type (i.e. Boeing 737-800) had the highest increase in movements of 82.7 per 16-hour day.
4. There were 98.0 movements per 8-hour night on average over the 2022 summer period, an increase of 57% from 2021 (62.3). The highest increase at night was also for the B738, which was up by 22.0 movements.
5. The daytime actual modal split was 58% SW / 42% NE (2021: 49% SW / 51% NE).
6. The area of the 2022 average summer day actual modal split 51 dB $L_{Aeq,16h}$ contour increased by 40% to 75.6 km² (2021: 54.1 km²). The population count within this contour increased by 70% to 10,900 (2021: 6,400).
7. The area of the 2022 average summer day standard modal split (72% SW / 28% NE) 51 dB $L_{Aeq,16h}$ contour increased by 39% to 75.5 km² (2021: 54.4 km²). The population count within this contour was 11,200, 49% higher than in 2021 (7,500). The standard 57 dB $L_{Aeq,16h}$ contour area (21.6 km²) was below the 33.9 km² contour area limit imposed by Stansted's current noise condition.
8. The area of the 2022 average summer night actual modal split (59% SW / 41% NE) 45 dB $L_{Aeq,8h}$ contour was 111.8 km², an increase of 24% from the previous year (2021: 90.4 km²). The population count within this contour was 20,100, 38% higher than in 2021 (14,600).
9. The 2022 standard modal split (70% SW / 30% NE) average summer night 45 dB $L_{Aeq,8h}$ contour area was 110.6 km² (2021: 89.5 km²), an increase of 24%. The population count within this contour increased by 24% 19,500 (2021: 15,700).

10. Contours were also produced for the supplementary noise metric N65. The area of the 2022 average summer day actual modal split (58% SW / 42% NE) N65 20-event contour was 161.7 km² (2021: 145.3 km²), with a population count of 22,600 (2021: 22,300). With the standard modal split (72% SW / 28% NE), the 20-event contour area was 144.9 km² (2021: 115.4 km²) and the population enclosed was 20,900 (2021: 18,600).

Chapter 1

Introduction

Background

- 1.1 Each year the Environmental Research and Consultancy Department (ERCD) of the Civil Aviation Authority (CAA) calculates the noise exposure around London Stansted Airport. Up until 2015, this work was carried out on behalf of the Department for Transport (DfT). Since 2016, ERCD has been commissioned directly by Stansted Airport Ltd (STAL).
- 1.2 The UK civil aircraft noise model ANCON is used to estimate the noise exposure. The model calculates the emission and propagation of noise from arriving and departing air traffic, and is validated with noise measurements.
- 1.3 The noise exposure metric used is the Equivalent Continuous Sound Level (L_{Aeq}), and in particular $L_{Aeq,16h}$ (07:00-23:00 local time), which is calculated over the 92-day summer period from 16 June to 15 September. The background to the use of this index is explained in DORA Report 9023 (**Ref 1**).
- 1.4 Noise exposure is depicted in the form of noise contours, i.e. lines joining places of constant L_{Aeq} , akin to the height contours shown on geographical maps or isobars on a weather chart. Historically in the UK, $L_{Aeq,16h}$ noise contours have been plotted at levels from 57 to 72 dB in 3 dB steps. However, the Survey of Noise Attitudes, SoNA 2014 (**Ref 2**), found that the degree of annoyance (based on the percentage of respondents highly annoyed), previously occurring at 57 dB, occurs at 54 dB. The $L_{Aeq,16h}$ contours for Stansted have therefore been plotted down to the lower level of 54 dB since 2017. At the airport's request, the $L_{Aeq,16h}$ contours since 2020 have also been plotted at 51 dB, this being defined in Government's Airspace and Noise Policy (**Ref 3**) as the daytime Lowest Observed Adverse Effect Level (LOAEL).
- 1.5 Following the publication of the Aviation Policy Framework in March 2013 (**Ref 4**), night-time (23:00-07:00 local time) $L_{Aeq,8h}$ noise contours have been produced on an annual basis for the designated¹ airports. Since 2013, night-time $L_{Aeq,8h}$ contours have therefore been calculated for Stansted from 48 to 72 dB in 3 dB steps in accordance with standard practice. At the airport's request, the $L_{Aeq,8h}$ contours since 2020 have also been plotted at the 45 dB level, this being

¹ Heathrow, Gatwick and Stansted airports have been designated for the purpose of avoiding, limiting or mitigating the effect of noise from aircraft since 1971. The Secretary of State's powers to designate airports in England and Wales, and to set noise controls, are contained within Section 78 of the Civil Aviation Act 1982. These powers are devolved in Scotland and Northern Ireland.

defined in Government’s Airspace and Noise Policy (**Ref 3**) as the night-time LOAEL.

- 1.6 Daytime contours using the supplementary noise metric N65 16-hour have also been produced. N65 contours indicate the number of aircraft noise events exceeding a maximum sound level (L_{Amax}) of 65 dB at a given location.
- 1.7 The objectives of this report are to explain the noise modelling methodology used to produce the 2022 day and night contours for Stansted Airport, to present the calculated noise contours and to assess the changes from the previous year (**Ref 5**). Long-term trends are also examined.

Stansted Airport

- 1.8 Stansted Airport is situated 35 miles (56 km) north-east of London and is surrounded by countryside and small villages to the north, south and east, and by the town of Bishop’s Stortford to the west (**Figure B1 of Appendix B**).
- 1.9 Stansted Airport has a single runway, designated 04/22, which is 3,049 m long. The Runway 04 landing threshold² is displaced by 300 m. There is one main passenger terminal. The layout of the runway, taxiways and passenger terminal is shown in **Figure B2**.³
- 1.10 In the 2022 calendar year there were approximately 177,000 aircraft movements at Stansted (2021: 93,000) and the airport handled 23.3 million passengers (2021: 7.1 million).⁴
- 1.11 Following the grant of planning permission in June 2021 for use of the airport up to 43 million passengers per annum (mppa), a new noise condition was imposed that states:

“The area enclosed by the 57 dB(A) Leq, 16h (0700-2300) contour shall not exceed 33.9 sq km for daytime noise. By the end of the first calendar year that annual passenger throughput exceeds 35million, the area enclosed by the following contours shall not exceed the limits in Table 1:

Table 1

<i>54 dB LAeq, 16hr</i>	<i>57.4 km²</i>
<i>48 dB LAeq, 8hr</i>	<i>74.0 km²</i>

² The runway threshold marks the beginning of the runway available for landing aircraft. A *displaced* threshold is a runway threshold that is not located at the physical end of the runway. A displaced threshold is often employed to give arriving aircraft sufficient clearance over an obstacle.

³ UK AIP, AD 2-EGSS-2-1

⁴ Source: Civil Aviation Authority (<https://www.caa.co.uk/airportstatistics>)

By the end of 2032 or by the end of the first calendar year that annual passenger throughput reaches 43million (whichever is sooner), Stansted Airport Limited, or any successor or airport operator, shall reduce the areas enclosed by the noise contours as set out in Table 2. Thereafter the areas enclosed by the contours as set out in Table 2, shall not be exceeded.

Table 2

<i>54 dB LAeq,16hr</i>	<i>51.9 km²</i>
<i>48 dB LAeq,8hr</i>	<i>73.6 km²</i>

For the purposes of this condition, the noise contour shall be calculated by the Civil Aviation Authority’s Environmental Research and Consultancy Department (ERCD) Aircraft Noise Contour model (current version 2.4), (or as may be updated or amended) or, following approval by the local planning authority, any other noise calculation tool such as the Federal Aviation Administration Aviation Environmental Design Tool (current version 3.0c) providing that the calculations comply with European Civil Aviation Conference Doc 29 4th Edition (or as may be updated or amended) and that the modelling is undertaken in line with the requirements of CAA publication CAP2091 (CAA Policy on Minimum Standards for Noise Modelling). All noise contours shall be produced using the standardised average mode.

To allow for the monitoring of aircraft noise, the airport operator shall make noise contour mapping available to the local planning authority annually as part of demonstrating compliance with this condition. Contours should be provided in 3dB increments from 51 dB LAeq,16hr and 45 dB LAeq,8hr.”

- 1.12 The airport has not surpassed 35 mppa and therefore, based on the above planning condition, the area of the standard (i.e. 20-year average) runway modal split 57 dB LAeq,16h contour is not to exceed a limit of 33.9 km².

Chapter 2

Noise modelling methodology

ANCON model

- 2.1 Noise contours were calculated with the UK civil aircraft noise model ANCON (version 2.4), which is developed and maintained by ERCD on behalf of the DfT. A technical description of ANCON is provided in R&D Report 9842 (**Ref 6**). The ANCON model is also used to produce the annual contours for Heathrow and Gatwick airports, and a number of other UK airports.
- 2.2 ANCON is fully compliant with the latest European guidance on noise modelling, ECAC.CEAC Doc 29 (Fourth edition), published in December 2016 (**Ref 7**). This guidance document represents internationally agreed best practice as implemented in modern aircraft noise models. The Fourth edition introduced some minor changes to the modelling of start-of-roll noise, which were incorporated in the 2017 software update to ANCON (version 2.4).

Radar data

- 2.3 The noise modelling carried out by ERCD made extensive use of radar data extracted from Stansted Airport's Noise and Track Keeping (NTK) system. Most large airports have NTK systems, which take data from Air Traffic Control (ATC) radars and combine them with flight information such as call sign, aircraft registration, aircraft type and destination. Analyses of departure and arrival flight tracks, and flight profiles, were based on 2022 summer radar data.

Flight tracks

- 2.4 Aircraft departing Stansted are required to follow specific flight paths called Noise Preferential Routes (NPRs) unless directed otherwise by ATC. NPRs were designed to avoid the overflight of built-up areas where possible. They establish a path from the take-off runway to the main UK air traffic routes and form the first part of the Standard Instrument Departure (SID) routes. The Stansted NPR/SID routes are illustrated in **Figure B3**.
- 2.5 Associated with each NPR is a lateral swathe, which is defined by a pair of lines that diverge at 10 degrees from a point 2,000 m from start-of-roll, leading to a corridor extending 1.5 km either side of the nominal NPR centreline. Within this swathe the aircraft are considered to be flying on-track. The swathe takes account of various factors that affect track-keeping, including tolerances in

navigational equipment, type and weight of aircraft, and weather conditions – particularly winds that may cause drifting when aircraft are turning. Aircraft reaching an altitude of 4,000 ft⁵ at any point along an NPR may be turned off the route by ATC onto more direct headings to their destinations – a practice known as ‘vectoring’. ATC may also vector aircraft from NPRs below this altitude for safety reasons, to avoid storms for example.

- 2.6 Departure and arrival flight tracks were modelled using radar data extracted from the Stansted NTK system over the 92-day summer period, 16 June to 15 September 2022. Mean flight tracks were calculated from 24-hour data since both day and night contours were being produced.
- 2.7 **Figure B4** shows a 24-hour sample of radar flight tracks from 1 August 2022. In-house radar analysis software was used to calculate mean departure flight tracks and associated lateral dispersions for each NPR/SID. Arrival tracks for Runways 04 and 22 were modelled using evenly-spaced ‘spurs’ about the extended runway centrelines. The majority of arriving aircraft joined the centrelines at distances between 10 and 25 km from the Runway 22 threshold, and between 9 and 24 km from the Runway 04 threshold.

Flight profiles

- 2.8 For each ANCON type, average flight profiles of height, speed and thrust versus track distance (for departures and arrivals separately) were reviewed and updated where necessary, using 2022 summer radar data. The engine power settings required for the aircraft to follow the average height and speed profiles were calculated from data describing aircraft performance characteristics within each of the different aircraft type categories. Daytime flight profiles were generated as in previous years.
- 2.9 At distances greater than about 10 km from the runway threshold, the average aircraft heights for arrivals on Runway 22 were higher than on Runway 04, as in preceding years. This was due to the use of Continuous Descent Operations (CDOs) on Runway 22, where aircraft generally join the glideslope at a greater height. CDOs have been employed for arrivals to Runway 22 since 1999. Separate Runway 22 and Runway 04 descent profiles were therefore used to model arrivals for all aircraft types.
- 2.10 The application of reverse thrust following touchdown was modelled for all ANCON types where applicable. Reverse thrust was included in both the day and night contours.

⁵ An altitude of 3,000 ft for aircraft on the UTAVA/NUGBO/BKY departure routes in the period 06:00-23:30.

Noise emissions

- 2.11 At Stansted, the NTK system captures data from both fixed and mobile noise monitors around the airport. Noise event data for individual aircraft operations were matched to operational data provided by the airport. The Stansted NTK system employs 8 fixed monitors positioned approximately 6.5 km from start-of-roll, together with several mobile monitors that can be deployed anywhere within the NTK radar coverage area.⁶
- 2.12 The noise data collected were screened by ERCD with reference to several criteria so that only reliable data were used in the analysis:
- Noise data that lay outside a ‘weather window’ were discarded. This ensured that the data used were not affected by adverse meteorological conditions such as precipitation and strong winds⁷.
 - The maximum noise level of the aircraft event had to exceed the noise monitor threshold by at least 10 dB to avoid underestimates of the Sound Exposure Level (SEL).
 - Only measurements obtained from aircraft operations that passed through a 60-degree inverted cone, centred at the noise monitor, were retained in order to minimise the effects of lateral attenuation and lateral directivity.⁸
 - At a given noise monitor location, flight operations with valid noise measurements had to account for at least 75% of total overflights. This ensured that the resulting average noise level was not biased higher than the true average noise level due to missing measurements for quieter flights.
- 2.13 The ANCON model calculates aircraft noise using a noise database expressing SEL as a function of engine power setting and slant distance to the receiver – also known as the ‘Noise-Power-Distance’ (NPD) relationship. The ANCON noise database is continually reviewed and updated with adjustments made annually when measurements show this to be necessary.
- 2.14 The most significant change to 2022 SEL noise levels was a decrease of approximately 0.5 dB for departures of the noise dominant B738. Validation of L_{Amax} levels, which are the basis of the N65 contours (but not the L_{Aeq} contours), was also carried out.

⁶ Further information on the noise monitors can be found in CAP 1149 (Ref 8).

⁷ Wind speeds above 10 m/s, in accordance with ISO 20906 (Ref 9).

⁸ *Lateral attenuation* is the excess sound attenuation caused by the ground surface, which can be significant at low angles of elevation. *Lateral directivity* is the non-uniform directionality of sound radiated laterally about the roll axis of the aircraft – this is influenced to a large extent by the positioning of the engines.

Daytime traffic by ANCON type

- 2.15 The contours were based on the daily average movements that took place during the 16-hour day (07:00-23:00 local time) and 8-hour night (23:00-07:00 local time), over the 92-day summer period from 16 June to 15 September inclusive. The source of this information was the Stansted NTK system, which stores radar data supplemented by daily flight plans. Traffic statistics from NTK data were cross-checked with runway logs supplied by NATS⁹ and close agreement was found.
- 2.16 International air travel continued its recovery in 2022 from the effects of the COVID-19 pandemic. The average number of daily movements at Stansted over the 2022 summer day period (467.9) was 67% higher than the previous year (2021: 280.1).
- 2.17 A breakdown of the 2022 average summer day movements by ANCON type is provided in **Table C1**. The largest increase in daily movements was for the ANCON type B738, which was up by 82.7 movements, followed by the B738MAX, which was up by 34.6 movements (note: descriptions of all the ANCON types can be found in **Table D1** of **Appendix D**).
- 2.18 **Figure B5** illustrates the numbers of movements by ANCON type for the 2022 average summer day. The B738 was the most common type at Stansted with 280.0 daily movements (60% of the total).
- 2.19 The B738 was the noise dominant ANCON type (for both departure and arrival noise) at Stansted during the daytime because it was responsible for the highest contribution of 'noise energy', which is a function of both aircraft noise level and movement numbers.
- 2.20 It is estimated¹⁰ that 99% of aircraft movements in the 2022 summer day period were compliant with the ICAO Chapter 4 noise standard.¹¹

⁹ NATS is the provider of air traffic control services to Stansted Airport.

¹⁰ The percentage figure is an estimate because in some cases, detailed aircraft information (e.g. aircraft weight, engine modifications) was not readily available, so some assumptions had to be made.

¹¹ Aircraft certification noise levels are classified by the ICAO *Standards and Recommended Practices – Aircraft Noise: Annex 16 to the Convention on International Civil Aviation* into 'Chapter 3', 'Chapter 4' and 'Chapter 14' types. The Chapter 4 standard (applicable from 2006) is more stringent than the Chapter 3 standard (1977) and typically characterised by modern, quieter, high-bypass turbofan aircraft. The Chapter 14 standard is applicable to new large aircraft types presented for certification from 31 December 2017 and it represents a further level of stringency compared to the Chapter 4 standard.

Night-time traffic by ANCON type

- 2.21 There were 98.0 aircraft movements on average over the 8-hour night in 2022, an increase of 57% from the previous year (2021: 62.3).
- 2.22 A breakdown of the 2022 average summer night movements by ANCON type is provided in **Table C2**. The highest increase was for the ANCON type B738, which was up by 22.0 movements per night.
- 2.23 **Figure B6** illustrates the numbers of movements by ANCON type for the 2022 average summer night. Similar to daytime, traffic was dominated by the B738 with 58.4 movements per night, representing 60% of the total.
- 2.24 The B738 was the noise dominant ANCON type (for both departure and arrival noise) at Stansted during the night-time period.
- 2.25 It is estimated that over 99% of aircraft movements in the 2022 summer night period were compliant with the ICAO Chapter 4 noise standard.

Daytime traffic distributions by NPR/SID route

- 2.26 **Figure B7** shows the percentage distribution of departing aircraft by NPR/SID route for the 2022 summer day period, with distribution figures from 2021 for comparison. In 2022, percentage loadings on the Runway 22 CLN SID increased by 8% as the runway modal split reverted to a more typical pattern. The RWY 04 BZD SID loading reduced by 7%.
- 2.27 Since 4 February 2016, when the LAMP 1A airspace change was implemented,¹² traffic that would previously have flown on the DET SID has been switched to the CLN SID.¹³ The effects of the switch can be seen in the statistics for the DET SIDs, which had no more than 1% of departure operations in each runway direction in 2022.

Night-time traffic distributions by NPR/SID route

- 2.28 **Figure B8** shows the percentage distribution of departing aircraft by NPR/SID route for the 2022 summer night period, with distribution figures from 2021 for comparison.
- 2.29 The percentage loadings on each of the Runway 22 SIDs increased by up to 5%, and decreased by up to 4% for the Runway 04 SIDs.

¹² <https://www.caa.co.uk/Commercial-industry/Airspace/Airspace-change/Decisions/London-Airspace-Management-Programme-Phase-1A/>

¹³ The DET SID is not normally available now during daytime hours.

2.30 As for daytime, the effects of the switch in traffic from the DET to CLN SIDs (following implementation of the LAMP 1A airspace change) can be seen in the relatively low percentage loadings on the DET routes of no more than 4%.

Runway modal splits

2.31 In general, aircraft will take-off and land into a headwind to maximise lift during take-off and landing. The wind direction, which varies over the course of a year, will therefore have an important influence on the usage of runways. The ratio of south-westerly (i.e. Runway 22) and north-easterly (i.e. Runway 04) operations is referred to as the *runway modal split*.

2.32 Two sets of contours have been produced for the 2022 summer day and night:

- (a) Using the ‘actual’ modal split over the $L_{Aeq,16h}$ day and $L_{Aeq,8h}$ night periods; and
- (b) Assuming the ‘standard’ modal split over the $L_{Aeq,16h}$ day and $L_{Aeq,8h}$ night periods, i.e. the long-term modal split calculated from the 20-year rolling average. For 2022, this was the 20-year period from 2003 to 2022. Use of the standard modal split enables year-on-year comparisons without the runway usage significantly affecting the contour shape.

2.33 The actual and standard daytime south-west / north-east (SW / NE) percentage modal splits for 2022 and 2021 are summarised in **Table 1**.

Table 1 Stansted daytime runway modal splits

Year	Actual modal split (SW / NE percentage)	Standard modal split (SW / NE percentage)
2022	58 / 42	72 / 28
2021	49 / 51	72 / 28

2.34 The daytime actual modal split in 2022 (58% SW / 42% NE) had a 9% higher proportion of south-westerly operations compared to 2021 (49% SW / 51% NE), the latter being an atypical year. The 2022 standard modal split of 72% SW / 28% NE was the same as for 2021. Historical daytime runway modal splits at Stansted for the past 20 years are illustrated in **Figure B9**.

2.35 The night-time actual runway modal split for the 2022 summer period was 59% SW / 41% NE. There was a 10% increase in the percentage of south-westerly operations compared to 2021 (49% SW / 51% NE). The night-time modal splits for 2022 and 2021 are summarised in **Table 2**.

Table 2 Stansted night-time runway modal splits

Year	Actual modal split (SW / NE percentage)	Standard modal split (SW / NE percentage)
2022	59 / 41	70 / 30
2021	49 / 51	70 / 30

2.36 The night-time standard runway modal split for the 20-year period 2003-2022 was 70% SW / 30% NE, the same as 2021. Night contours were produced using the standard modal split for the first time, for 2021.

Topography

2.37 The topography around Stansted Airport was modelled by accounting for terrain height. This was achieved by geometrical corrections for source-receiver distance and elevation angles. Other, more complex effects, such as lateral attenuation from uneven ground surfaces and noise screening/reflection effects due to topographical features, were not considered.

2.38 ERCD holds OS terrain height data on a 50-metre grid for the whole of Great Britain. Interpolation was performed to generate height data at each of the calculation points on the receiver grid used by the ANCON noise model. The terrain heights above mean sea level (AMSL) in the vicinity of Stansted Airport are illustrated in **Figure B10**.

Population and 'Points of Interest' databases

2.39 Estimates were made of the numbers of people and households enclosed by the noise contours. The population data used in this report are a 2022 update of the 2011 Census supplied by CACI Limited.

2.40 The CACI population database contains data referenced at postcode level. Population and household numbers for each postcode are assigned to a single coordinate located at the postcode's centroid. The postcode datapoints and associated population counts for the area around Stansted Airport are illustrated in **Figure B11**.

2.41 Within the extent of the 2022 summer day actual 51 dB $L_{Aeq,16h}$ contour, the population count using the 2022 population database was 4% higher than with the 2021 database. This provides an indication of the effect of any population changes in the vicinity of the airport on the results presented in Chapter 3.

- 2.42 Estimates have also been made of the numbers of noise sensitive buildings located within the daytime contours, using the PointX 'Points of Interest' (2022) database. For the purpose of this study, the noise sensitive buildings that have been considered are colleges, schools (including nurseries), hospitals and places of worship.

Chapter 3

Results

2022 day actual $L_{Aeq,16h}$ contours

3.1 The Stansted 2022 summer day $L_{Aeq,16h}$ noise contours generated with the actual runway modal split (58% SW / 42% NE) are shown in **Figure B12**. The contours are plotted from 51 to 72 dB at 3 dB intervals. Cumulative estimates of the areas, populations and households within the contours are provided in **Table 3**.

Table 3 Stansted 2022 summer day actual modal split $L_{Aeq,16h}$ contours – area, population and household estimates

$L_{Aeq,16h}$ (dB)	Area (km ²)	Population	Households
> 51	75.6	10,900 (10,500)	4,400 (4,200)
> 54	40.3	4,600 (4,500)	1,800 (1,800)
> 57	21.4	1,800 (1,700)	700 (600)
> 60	11.5	600 (400)	200 (200)
> 63	6.0	200 (100)	100 (< 100)
> 66	3.0	100 (< 100)	< 100 (< 100)
> 69	1.6	0 (0)	0 (0)
> 72	0.9	0 (0)	0 (0)

Note: Populations and households are given to the nearest 100, and estimates using the 2021 population database are also given in **brackets** for comparison purposes.

3.2 The 2022 summer day actual 51 dB $L_{Aeq,16h}$ contour enclosed an area of 75.6 km² and a population of 10,900.

3.3 Estimates of the cumulative numbers of noise sensitive buildings within the 2022 summer day actual $L_{Aeq,16h}$ contours are provided in **Table 4**.

Table 4 Stansted 2022 summer day actual modal split $L_{Aeq,16h}$ contours – noise sensitive building estimates

$L_{Aeq,16h}$ (dB)	Colleges	Schools	Hospitals	Places of worship
> 51	1	11	0	11
> 54	1	3	0	7
> 57	1	2	0	3
> 60	1	0	0	2
> 63	1	0	0	0
> 66	1	0	0	0
> 69	0	0	0	0
> 72	0	0	0	0

2022 night actual $L_{Aeq,8h}$ contours

3.4 The Stansted 2022 summer night $L_{Aeq,8h}$ noise contours generated with the actual runway modal split (59% SW / 41% NE) are shown in **Figure B13**. The contours are plotted from 45 to 66 dB at 3 dB intervals (note: the 69 and 72 dB contours have been omitted for clarity). Cumulative estimates of the areas, populations and households within the contours are provided in **Table 5**.

Table 5 Stansted 2022 summer night actual modal split $L_{Aeq,8h}$ contours – area, population and household estimates

$L_{Aeq,8h}$ (dB)	Area (km ²)	Population	Households
> 45	111.8	20,100 (19,700)	8,100 (7,900)
> 48	63.4	9,000 (8,600)	3,600 (3,400)
> 51	34.6	4,500 (4,300)	1,800 (1,700)
> 54	18.0	1,400 (1,300)	500 (500)
> 57	9.3	400 (300)	200 (100)
> 60	4.8	100 (< 100)	100 (< 100)
> 63	2.4	0 (0)	0 (0)
> 66	1.3	0 (0)	0 (0)
> 69	0.8	0 (0)	0 (0)
> 72	0.5	0 (0)	0 (0)

Note: Populations and households are given to the nearest 100, and estimates using the 2021 population database are also given in [brackets](#) for comparison purposes.

3.5 The 2022 summer night actual 45 dB $L_{Aeq,8h}$ contour enclosed an area of 111.8 km² and a population of 20,100.

2022 day standard $L_{Aeq,16h}$ contours

3.6 The Stansted 2022 summer day $L_{Aeq,16h}$ noise contours generated with the standard runway modal split (72% SW / 28% NE) are shown in **Figure B14**. The contours are plotted from 51 to 72 dB at 3 dB intervals. Cumulative estimates of the areas, populations and households within the contours are provided in **Table 6**.

Table 6 Stansted 2022 summer day standard modal split $L_{Aeq,16h}$ contours – area, population and household estimates

$L_{Aeq,16h}$ (dB)	Area (km ²)	Population	Households
> 51	75.5	11,200 (11,000)	4,500 (4,300)
> 54	41.0	5,600 (5,400)	2,200 (2,100)
> 57	21.6	1,600 (1,500)	600 (500)
> 60	11.5	600 (500)	200 (200)
> 63	6.1	200 (100)	100 (100)
> 66	3.1	100 (< 100)	< 100 (< 100)
> 69	1.6	0 (0)	0 (0)
> 72	0.9	0 (0)	0 (0)

Note: Populations and households are given to the nearest 100, and estimates using the 2021 population database are also given in **brackets** for comparison purposes.

3.7 The 2022 summer day standard 51 dB $L_{Aeq,16h}$ contour enclosed an area of 75.5 km² and a population of 11,200.

3.8 Estimates of the cumulative numbers of noise sensitive buildings within the 2022 summer day standard $L_{Aeq,16h}$ contours are provided in **Table 7**.

3.9 The 57 dB $L_{Aeq,16h}$ standard modal split contour area of 21.6 km² was below the Stansted planning noise condition contour area limit of 33.9 km² (see section 1.11).

Table 7 Stansted 2022 summer day standard modal split $L_{Aeq,16h}$ contours – noise sensitive building estimates

$L_{Aeq,16h}$ (dB)	Colleges	Schools	Hospitals	Places of worship
> 51	1	11	0	13
> 54	1	4	0	7
> 57	1	1	0	2
> 60	1	1	0	2
> 63	1	0	0	0
> 66	1	0	0	0
> 69	0	0	0	0
> 72	0	0	0	0

2022 night standard $L_{Aeq,8h}$ contours

3.10 Summer night $L_{Aeq,8h}$ noise contours have been produced with the standard (20-year average) runway modal split (70% SW / 30% NE) for 2022 and they are shown in **Figure B15**. The contours are plotted from 45 to 66 dB at 3 dB intervals (note: the 69 and 72 dB contours have been omitted for clarity). Cumulative estimates of the areas, populations and households within the contours are provided in **Table 8**.

Table 8 Stansted 2022 summer night standard modal split $L_{Aeq,8h}$ contours – area, population and household estimates

$L_{Aeq,8h}$ (dB)	Area (km ²)	Population	Households
> 45	110.6	19,500 (19,200)	7,800 (7,700)
> 48	63.2	8,600 (8,400)	3,400 (3,400)
> 51	34.6	4,700 (4,500)	1,900 (1,800)
> 54	18.2	1,300 (1,200)	500 (400)
> 57	9.4	400 (300)	200 (100)
> 60	4.8	100 (< 100)	100 (< 100)
> 63	2.5	0 (0)	0 (0)
> 66	1.3	0 (0)	0 (0)
> 69	0.8	0 (0)	0 (0)
> 72	0.5	0 (0)	0 (0)

Note: Populations and households are given to the nearest 100, and estimates using the 2021 population database are also given in **brackets** for comparison purposes.

3.11 The 2022 summer night standard 45 dB $L_{Aeq,8h}$ contour enclosed an area of 110.6 km² and a population of 19,500.

2022 day actual $L_{Aeq,16h}$ contours – comparison with 2021

3.12 The Stansted 2022 and 2021 summer day actual modal split $L_{Aeq,16h}$ contours are compared in **Figure B16** from 51 to 66 dB. The changes in area and population between 2021 and 2022 are summarised in **Table 9**.

Table 9 Stansted 2021 and 2022 summer day actual $L_{Aeq,16h}$ contours – area and population estimates

$L_{Aeq,16h}$ (dB)	2021 area (km ²)	2022 area (km ²)	Area change	2021 population	2022 population	Population change
> 51	54.1	75.6	+40%	6,400	10,900	+70%
> 54	29.1	40.3	+38%	2,300	4,600	+100%
> 57	15.7	21.4	+36%	1,100	1,800	+64%
> 60	8.3	11.5	+39%	200	600	+200%
> 63	4.1	6.0	+46%	< 100	200	(n/a)
> 66	2.0	3.0	+50%	0	100	(n/a)
> 69	1.1	1.6	+45%	0	0	(n/a)
> 72	0.7	0.9	+29%	0	0	(n/a)

Note: The 2021 and 2022 summer day actual runway modal splits were 49% SW / 51% NE and 58% SW / 42% NE respectively.

3.13 The 54 dB contour area increased by 40% in 2022 and areas also increased at the other contour levels by up to 50%. The area increases were predominantly the result of the 67% rise in daytime movements. The population counts for the 51 dB and 54 dB contours rose by 70% and 100% respectively. The shift in runway modal split in 2022 from the atypical figure of the previous year had significant effects on the contour shapes and thus the population counts as well.

3.14 Percentage changes in contour area are not necessarily accompanied by similar changes in enclosed population because of the uneven distribution of populations around the airport.

2022 night actual $L_{Aeq,8h}$ contours – comparison with 2021

3.15 The Stansted 2021 and 2022 night actual modal split $L_{Aeq,8h}$ contours are compared in **Figure B17** from 45 to 63 dB. **Table 10** summarises the changes in area and population between 2021 and 2022.

Table 10 Stansted 2021 and 2022 summer night actual $L_{Aeq,8h}$ contours – area and population estimates

$L_{Aeq,8h}$ (dB)	2021 area (km ²)	2022 area (km ²)	Area change	2021 population	2022 population	Population change
> 45	90.4	111.8	+24%	14,600	20,100	+38%
> 48	50.2	63.4	+26%	5,800	9,000	+55%
> 51	27.4	34.6	+26%	2,200	4,500	+105%
> 54	15.1	18.0	+19%	1,000	1,400	+40%
> 57	8.2	9.3	+13%	200	400	+100%
> 60	4.1	4.8	+17%	< 100	100	(n/a)
> 63	2.1	2.4	+14%	0	0	(n/a)
> 66	1.1	1.3	+18%	0	0	(n/a)
> 69	0.7	0.8	+14%	0	0	(n/a)
> 72	0.4	0.5	+25%	0	0	(n/a)

Note: The 2021 and 2022 summer night actual runway modal splits were 49% SW / 51% NE and 59% SW / 41% NE respectively.

3.16 The 45 dB contour area increased by 24% in 2022 and areas also increased at the other contour levels by up to 26%. The area increases were predominantly the result of the 57% movement rise at night in 2022.

3.17 The population count inside the 45 dB contour increased by 38% and even larger percentage increases were seen at some of the higher contour levels. The shift in runway modal split in 2022 from the atypical figure of the previous year had significant effects on the contour shapes and thus the population counts as well.

2022 day standard $L_{Aeq,16h}$ contours – comparison with 2021

3.18 The Stansted 2022 and 2021 summer day standard modal split $L_{Aeq,16h}$ contours are compared in **Figure B18** from 51 to 66 dB. **Table 11** summarises the changes in area and population between 2021 and 2022.

Table 11 Stansted 2021 and 2022 summer day standard $L_{Aeq,16h}$ contours – area and population estimates

$L_{Aeq,16h}$ (dB)	2021 area (km ²)	2022 area (km ²)	Area change	2021 population	2022 population	Population change
> 51	54.4	75.5	+39%	7,500	11,200	+49%
> 54	29.3	41.0	+40%	2,300	5,600	+143%
> 57	15.7	21.6	+38%	900	1,600	+78%
> 60	8.3	11.5	+39%	300	600	+100%
> 63	4.2	6.1	+45%	< 100	200	(n/a)
> 66	2.1	3.1	+48%	0	100	(n/a)
> 69	1.1	1.6	+45%	0	0	(n/a)
> 72	0.7	0.9	+29%	0	0	(n/a)

Note: The 2021 and 2022 summer day standard runway modal splits were both 72% SW / 28% NE.

3.19 The standard contours normally provide a clearer indication than the actual contours of ‘fleet noise level’ changes from year to year, because they minimise the effects of any differences between the ratios of south-westerly to north-easterly operations.

3.20 The 51 dB contour area increased by 39% in 2022 and areas also increased at the other contour levels by up to 48%. The area increases were predominantly the result of the 67% rise in daytime movements. The population count inside the 51 dB contour rose by 49% and higher percentage increases were seen at some of the higher contour levels.

2022 night standard $L_{Aeq,8h}$ contours – comparison with 2021

3.21 The Stansted 2021 and 2022 night standard modal split $L_{Aeq,8h}$ contours are compared in **Figure B19** from 45 to 63 dB. **Table 12** summarises the changes in area and population between 2021 and 2022.

Table 12 Stansted 2021 and 2022 summer night standard $L_{Aeq,8h}$ contours – area and population estimates

$L_{Aeq,8h}$ (dB)	2021 area (km ²)	2022 area (km ²)	Area change	2021 population	2022 population	Population change
> 45	89.5	110.6	+24%	15,700	19,500	+24%
> 48	50.4	63.2	+25%	6,800	8,600	+26%
> 51	27.5	34.6	+26%	2,000	4,700	+135%
> 54	15.2	18.2	+20%	900	1,300	+44%
> 57	8.2	9.4	+15%	300	400	+33%
> 60	4.2	4.8	+14%	< 100	100	(n/a)
> 63	2.1	2.5	+19%	0	0	(n/a)
> 66	1.1	1.3	+18%	0	0	(n/a)
> 69	0.7	0.8	+14%	0	0	(n/a)
> 72	0.4	0.5	+25%	0	0	(n/a)

Note: The 2021 and 2022 summer night standard runway modal splits were both 70% SW / 30% NE.

3.22 The 45 dB contour area increased by 24% in 2022 and areas also increased at the other contour levels by up to 26%.

3.23 The population count inside the 45 dB contour increased by 24% and even larger percentage increases were seen at some of the higher contour levels.

Daytime $L_{Aeq,16h}$ noise contour historical trend

3.24 **Figure B20** shows how the 57 dB $L_{Aeq,16h}$ day actual modal split contour has changed in area and population terms since 1988 by comparison with the total annual (365-day) aircraft movements. Actual modal split data are used in this figure because standard modal split contours were not produced prior to 1995.

Annual movements

- 3.25 Annual movements at Stansted rose steadily between 1990 and 2001, showing rapid growth between 1997 and 1999. The number of movements in 2001 and 2002 were similar, but in 2003, the annual figure rose by 9% over the preceding year. A 7% rise in 2006 was followed by a 1% increase in 2007, when the level of annual movements reached a peak.
- 3.26 The total annual movement figure for 2008 dropped by 7% from the 2007 peak – this can be attributed to the economic downturn and fluctuating oil price. The movement figure declined even further in 2009, by 13%, as the global recession continued to affect the aviation industry.
- 3.27 The year 2010 saw another fall in traffic for the third year running, this time by 8%. The volcanic ash crisis in April, industrial action in May, adverse winter weather and a continued reduction in demand for leisure travel were some of the factors that caused the decline in traffic.
- 3.28 Annual traffic dropped by 4% in 2011 and reached a low in 2012 after having fallen for the fifth year in a row, this time by 3%, reflecting the continued reduction in demand for flights over this period. However, 2013 saw the first increase in annual flights (by 2%) following five years of consecutive decline from the 2007 peak. Movements continued to rise by 5-7% each year from 2014 to 2018 as demand returned, although in 2019, they reduced by 1%.
- 3.29 The year 2020 was greatly impacted by the COVID-19 pandemic, which led to a 57% reduction in annual movements. In 2021, movements recovered by 8% as international travel restrictions eased during the summer, but they were still relatively low compared to 2019. The recovery accelerated in 2022 as air travel restrictions eased further and annual movements rose by 90%.

Areas and populations

- 3.30 Up to 1998, areas and populations within the 57 dB $L_{Aeq,16h}$ contour have generally risen in line with movements, but in 1999, despite the high traffic growth, the area fell by 19%. This decrease was attributable to fewer movements of older, noisier, Chapter 2 aircraft – especially those by the BAC 1-11, which fell by 64% in that year.
- 3.31 Areas generally declined after 2001 following completion of the phase-out of Chapter 2 aircraft. There was a 7% decrease in traffic in 2008 and the area fell

by 6%, reducing further in 2009 by 17% and again in 2010 by 7% as total movements dropped. The 2011 and 2012 areas fell to the lowest levels seen at Stansted since 1990 as traffic levels continued to drop. The area decreased further in 2013 to 20.0 km² as summer period traffic decreased, despite the overall movements increase seen over the annual period. Up till then, this was also the smallest 57 dB L_{Aeq,16h} actual contour area calculated for Stansted. (The previous smallest area had been 20.1 km² in 1990). However, the contour area increased between 2014 (21.6 km²) and 2018 (28.5 km²) as movements rose each year. The 2019 summer saw a halt to the area growth trend as annual movements fell for the first time in 7 years, and the 2019 area was unchanged from 2018.

- 3.32 The reductions in flights following the COVID-19 pandemic in 2020 meant the 57 dB contour area in 2020 was the lowest ever recorded, at 11.8 km². The contour area increased by 33% in 2021 as traffic levels started to recover, and increased by 40% in 2022 as movements increased further.
- 3.33 From 2001 to 2008, population counts fluctuated within a range from approximately 2,000 to 2,900. The years with higher proportions of south-westerly movements have tended to produce the higher population counts. In 2009, the shift in modal split to a lower proportion of south-westerly movements along with lower movement numbers caused the population count to dip to 1,500.
- 3.34 From 2009 to 2013, population counts were relatively steady, albeit reducing as contour areas continued to fall year-on-year. Since 2013, populations have generally risen. In 2014 the population count increased by 32% as the contour extended into some populated areas. This resulted from growth in summer movements and a higher proportion of north-easterly operations, which affected the contour shape. In 2015, a return to a more typical runway modal split led to changes in the contour shape, with the net effect being an unchanged population count. A shift to a higher percentage of south-westerly operations in 2016 led to a 24% population increase as the contour stretched across populated areas such as Thaxted and Little Hallingbury. The population increased by 20% in 2017 as the contour expanded over the same areas following a 10% rise in movements. However, the population fell by 14% in 2018 as a large shift in favour of easterly movements pulled the contour away from Thaxted. The runway modal split reverted to a higher percentage of south-westerly movements in 2019, which meant that the 57 dB contour extended over parts of Thaxted, causing the population count to rise by 19%.
- 3.35 The population count reduced by 80% in 2020 as the 57 dB contour area dropped to its lowest ever level, before increasing by 120% in 2021 and then by 70% in 2022 as movements recovered from the effects of the COVID-19 pandemic.

Supplementary noise metric – N65 day contours

- 3.36 N65 contours¹⁴ have been produced for the 2022 summer daytime period, using the same modelling input data as the L_{Aeq,16h} actual modal split (58% SW / 42% NE) contours.
- 3.37 The N65 day actual contours are shown in **Figure B21**, plotted at levels of 20, 50, 100 and 200 events. Estimates of area, population and households within the N65 day actual contours are summarised in **Table 13**.

Table 13 Stansted 2022 summer day actual modal split N65 contours – area, population and household estimates

N65	Area (km ²)	Population	Households
> 20	161.7	22,600	9,000
> 50	90.6	13,700	5,400
> 100	45.4	6,100	2,500
> 200	17.3	1,400	500
> 500	0.0	0	0

Note: Populations and households are given to the nearest 100. The 2022 summer day actual runway modal split was 58% SW / 42% NE.

- 3.38 The 2022 summer day actual N65 20-event contour enclosed an area of 161.7 km² (2021: 145.3 km²) and a population of 22,600 (2021: 22,300). The area increases were predominantly the result of the 67% rise in movements.
- 3.39 Estimates of the cumulative numbers of noise sensitive buildings within the 2022 summer day actual N65 contours are provided in **Table 14**.

¹⁴ N65 contours show the number of aircraft noise events exceeding 65 dB L_{Amax}.

Table 14 Stansted 2022 summer day actual modal split N65 contours – noise sensitive building estimates

N65	Colleges	Schools	Hospitals	Places of worship
> 20	1	16	0	25
> 50	1	12	0	18
> 100	1	6	0	9
> 200	1	1	0	2
> 500	0	0	0	0

3.40 N65 contours have also been produced for the 2022 summer day standard modal split (72% SW / 28% NE) and they are shown in **Figure B22**, plotted at levels of 20, 50, 100 and 200 events. Estimates of area, population and households within the N65 summer day standard contours are summarised in **Table 15**.

Table 15 Stansted 2022 summer day standard modal split N65 contours – area, population and household estimates

N65	Area (km ²)	Population	Households
> 20	144.9	20,900	8,200
> 50	88.6	12,700	5,000
> 100	45.8	6,600	2,600
> 200	16.8	1,400	500
> 500	0.0	0	0

Note: Populations and households are given to the nearest 100. The 2022 summer day standard runway modal split was 72% SW / 28% NE.

3.41 The 2022 summer day standard N65 20-event contour enclosed an area of 144.9 km² (2021: 115.4 km²) and a population of 20,900 (2021: 18,600). The area increases were predominantly the result of the 67% rise in movements.

3.42 Estimates of the cumulative numbers of noise sensitive buildings within the 2022 summer day standard N65 contours are provided in **Table 16**.

Table 16 Stansted 2022 summer day standard modal split N65 contours – noise sensitive building estimates

N65	Colleges	Schools	Hospitals	Places of worship
> 20	1	15	0	21
> 50	1	11	0	15
> 100	1	8	0	10
> 200	1	1	0	2
> 500	0	0	0	0

Chapter 4

Conclusions

- 4.1 Year 2022 average summer day $L_{Aeq,16h}$ and night $L_{Aeq,8h}$ noise exposure contours have been generated for Stansted Airport using the ANCON noise model.
- 4.2 Movements over the 2022 summer day period rose by 67% to 467.9 from 2021 (280.1), as air travel continued to recover from the effects of the COVID-19 pandemic. The 2022 average summer day actual modal split (58% SW / 42% NE) 51 dB $L_{Aeq,16h}$ contour area increased by 40% to 75.6 km² (2021: 54.1 km²). The population enclosed within this contour was 10,900, a 70% increase from the previous year (2021: 6,400).
- 4.3 The 2022 average summer day standard modal split (72% SW / 28% NE) 51 dB $L_{Aeq,16h}$ contour area increased by 39% to 75.5 km² (2021: 54.4 km²). The 57 dB $L_{Aeq,16h}$ contour area was 21.6 km², which was below the 33.9 km² limit imposed by Stansted's planning noise condition. The population count of 11,200 within the 2022 summer day standard 51 dB $L_{Aeq,16h}$ contour was 49% higher than in 2021 (7,500).
- 4.4 Movements over the 2022 summer night period rose by 57% to 98.0 from 2021 (62.3). The 2022 average summer night actual modal split (59% SW / 41% NE) 45 dB $L_{Aeq,8h}$ contour enclosed an area of 111.8 km², which was 24% higher than the previous year (2021: 90.4 km²). The population count of 20,100 within this contour was 38% higher than in 2021 (14,600).
- 4.5 The 2022 average summer night standard runway modal split (70% SW / 30% NE) 45 dB $L_{Aeq,8h}$ contour enclosed an area of 110.6 km² (2021: 89.5 km²), and the population count was 19,500 (2021: 15,700).
- 4.6 Supplementary noise metric N65 contours have also been produced for the 2022 average summer 16-hour day period. The area of the N65 20-event actual modal split (58% SW / 42% NE) contour was 161.7 km² (2021: 145.3 km²), enclosing a population of 22,600 (2021: 22,300). The N65 20-event contour assuming the standard modal split (72% SW / 28% NE) was 144.9 km² (2021: 115.4 km²), with a population count of 20,900 (2021: 18,600).

APPENDIX A

References

1. Critchley J B, Ollerhead J B, *The Use of Leq as an Aircraft Noise Index*, DORA Report 9023, September 1990.
2. Civil Aviation Authority, *Survey of Noise Attitudes (2014): Aircraft*, CAP 1506, February 2017.
3. Department for Transport, *Consultation Response on UK Airspace Policy: A framework for balanced decisions on the design and use of airspace*, Cm 9520, October 2017.
4. Department for Transport, *Aviation Policy Framework*, Cm 8584, March 2013.
5. Civil Aviation Authority, *Noise Exposure Contours for Stansted Airport 2021*, ERCD Report 2203, May 2022.
6. Ollerhead J B, Rhodes D P, Viinikainen M S, Monkman D J, Woodley A C, *The UK Civil Aircraft Noise Contour Model ANCON: Improvements in Version 2*, R&D Report 9842, June 1999.
7. European Civil Aviation Conference, *Report on Standard Method of Computing Noise Contours around Civil Airports*, ECAC.CEAC Doc 29, Fourth edition, December 2016.
8. Civil Aviation Authority, *Noise Monitor Positions at Heathrow, Gatwick and Stansted Airports*, CAP 1149, 8th edition, March 2022.
9. ISO 20906:2009 *Acoustics - Unattended monitoring of aircraft sound in the vicinity of airports*.

APPENDIX B

Figures

Figure B1 Stansted Airport and the surrounding area

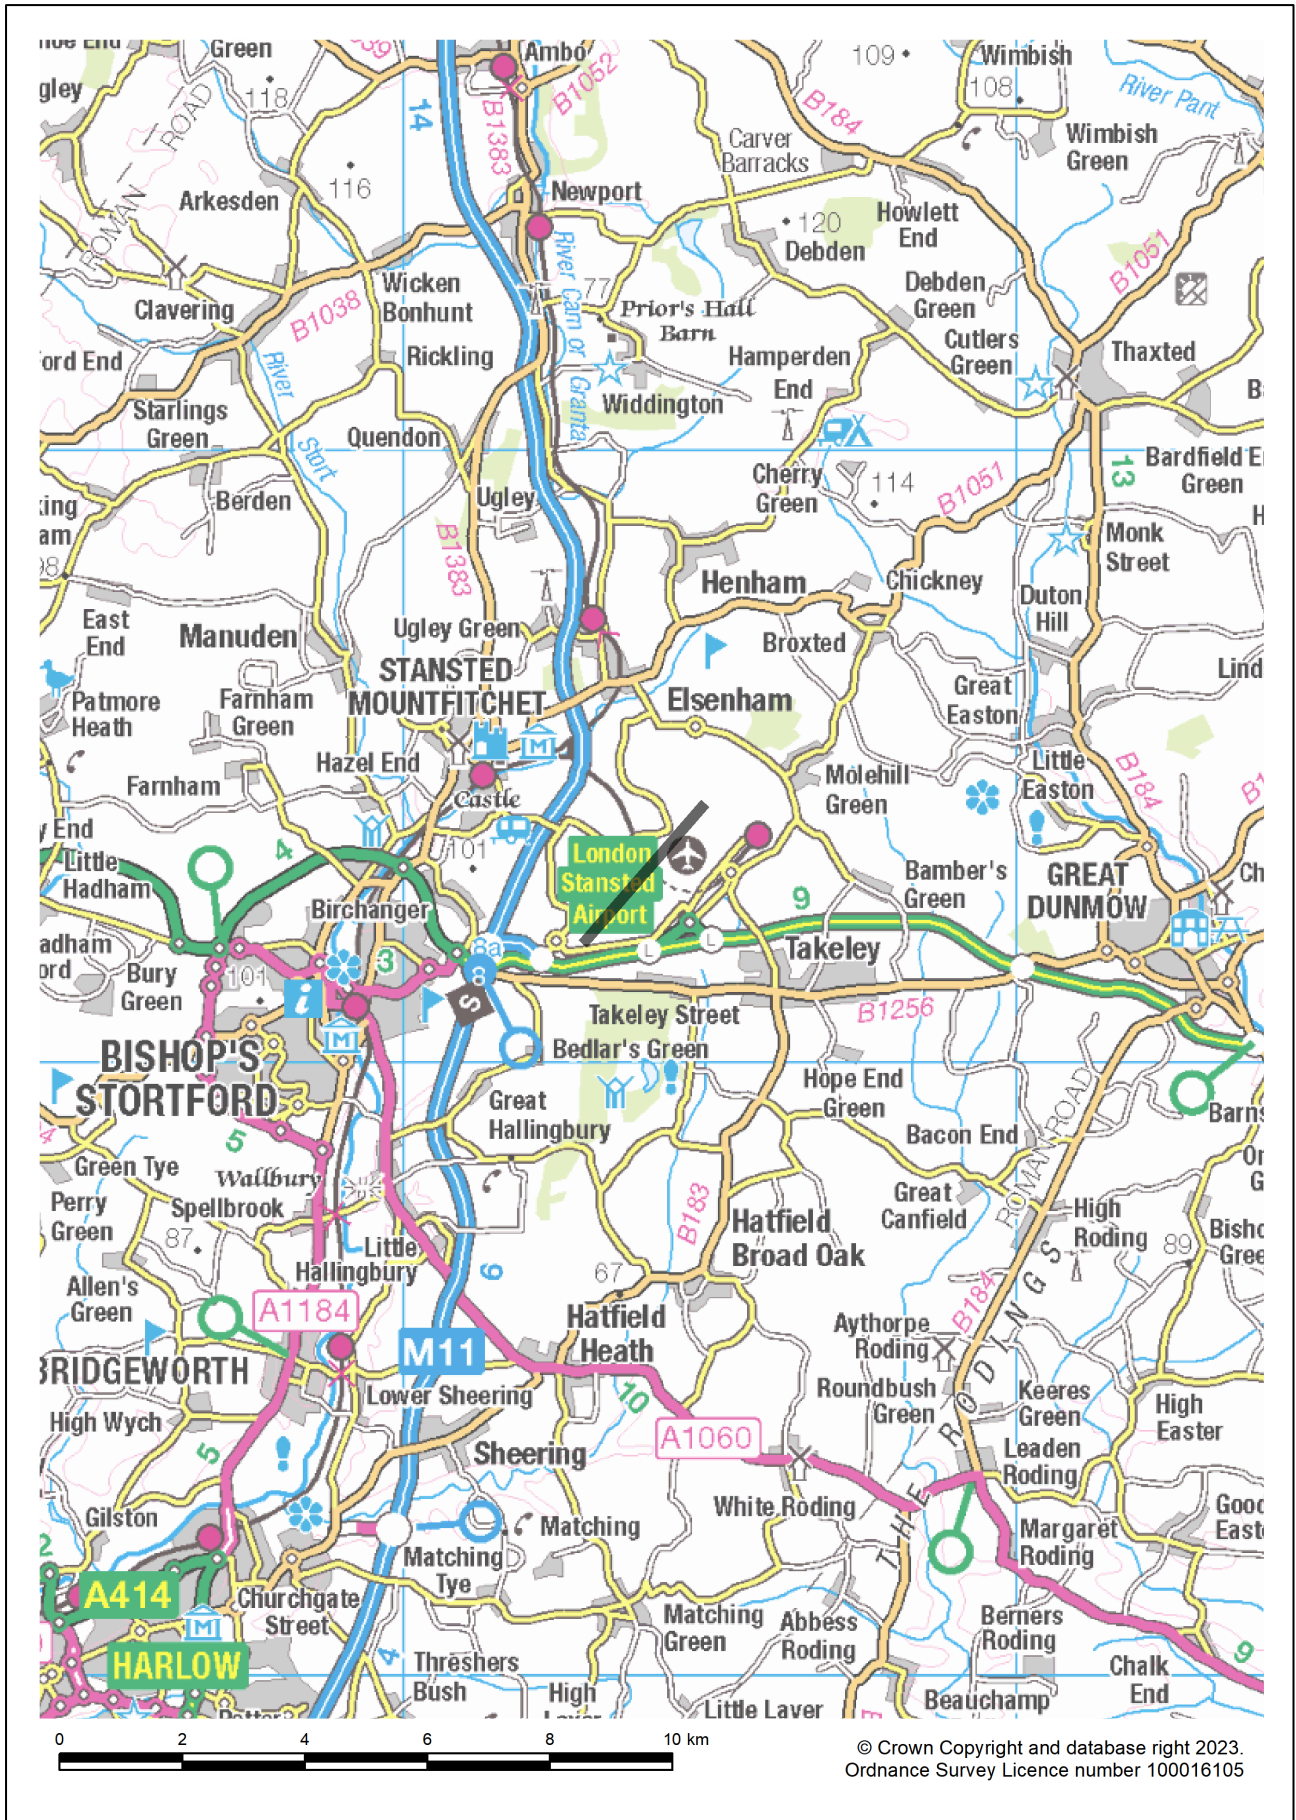


Figure B2 Stansted Airport layout

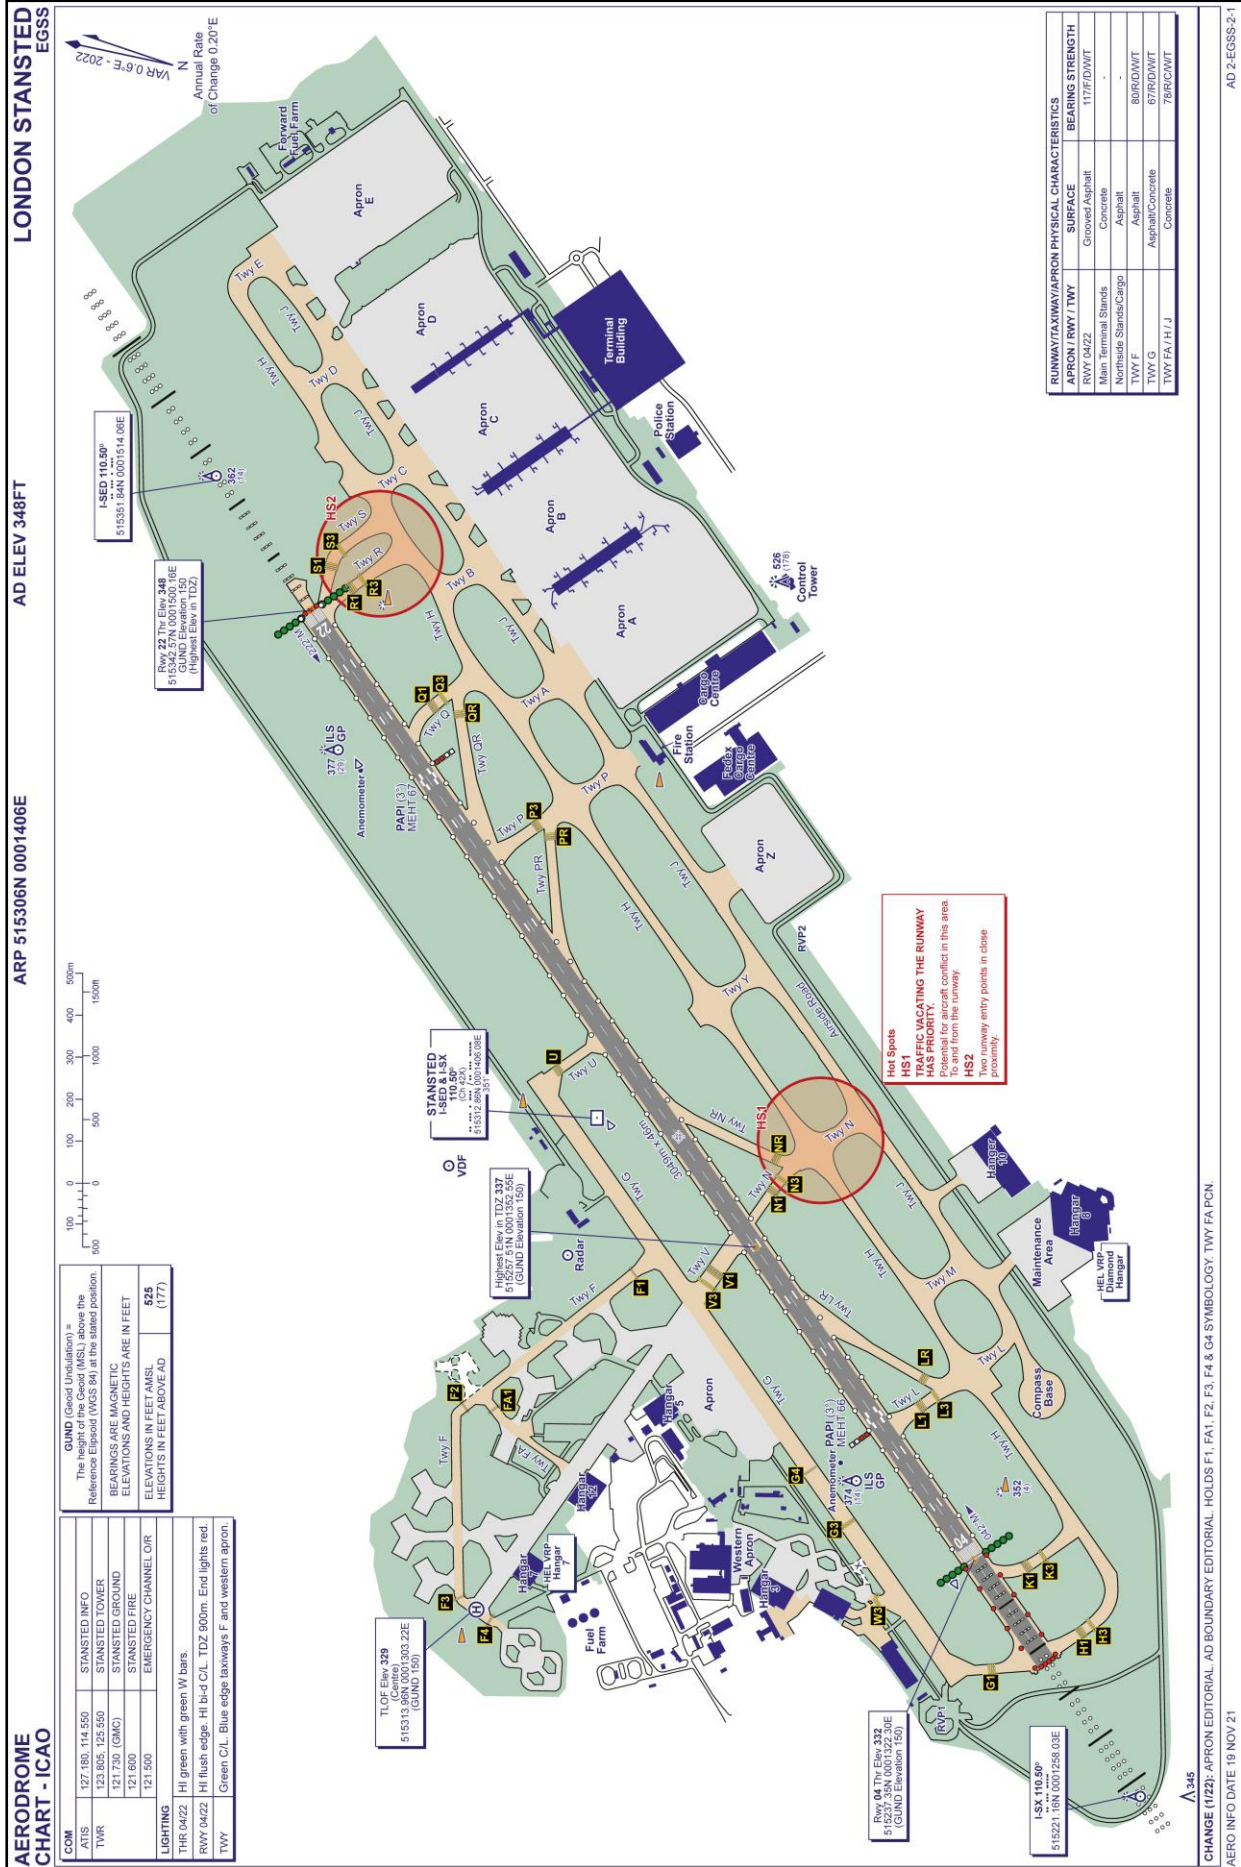


Figure B3 Stansted NPR/SID routes

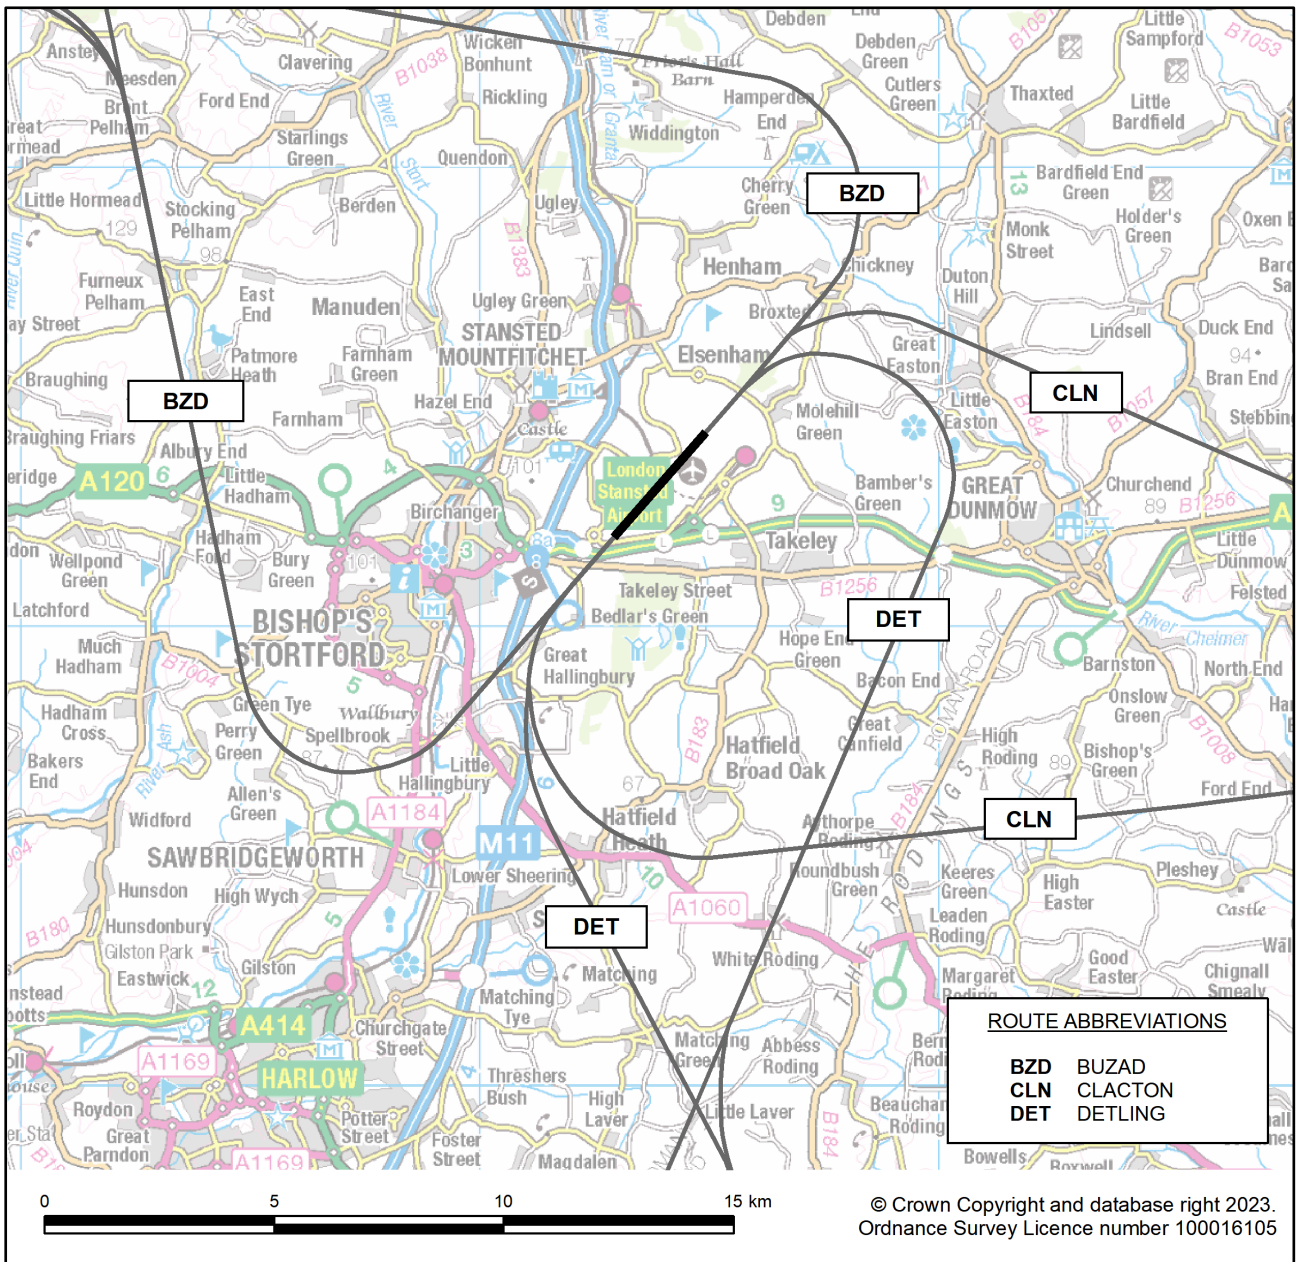


Figure B4 Typical Stansted radar flight tracks

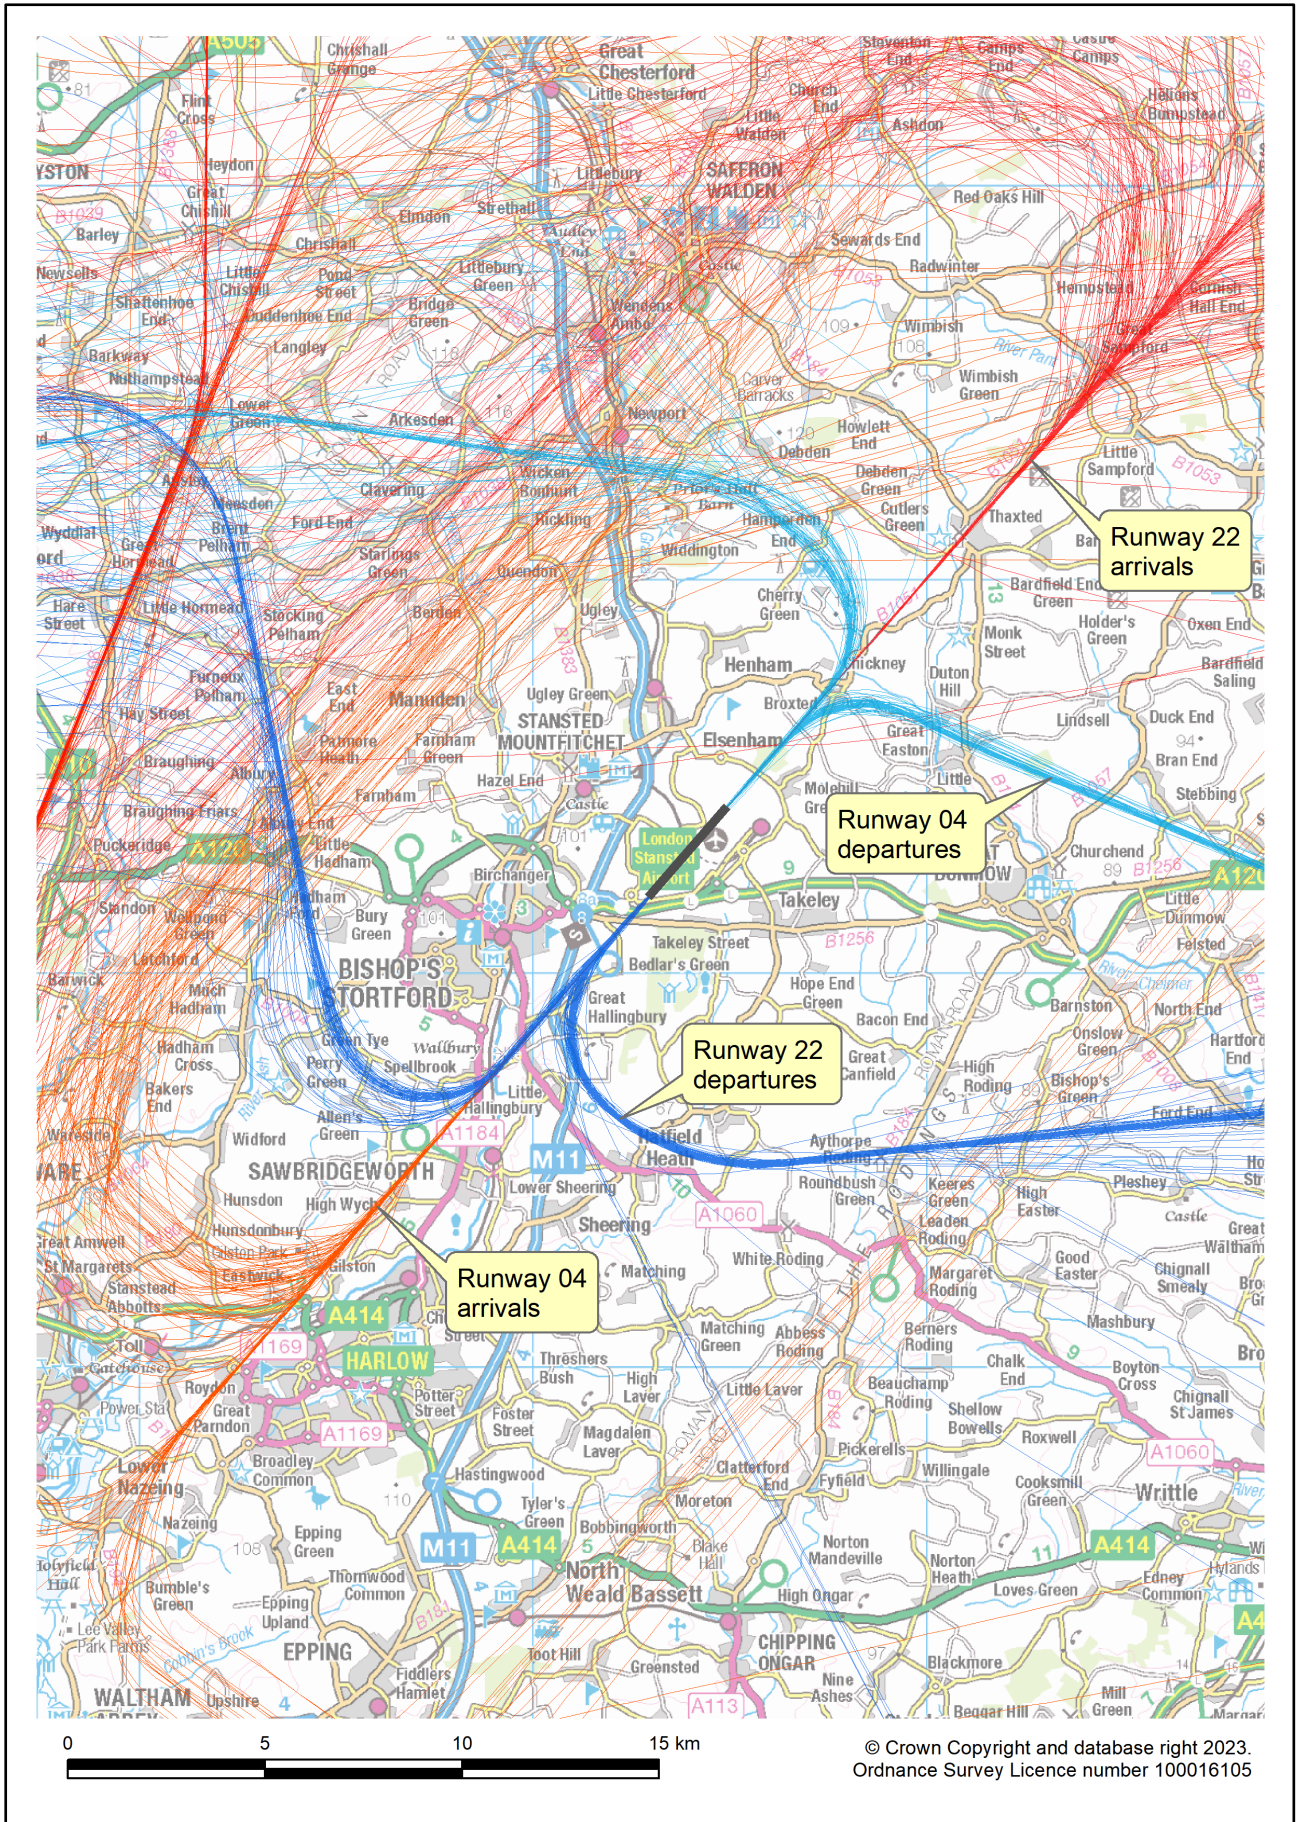


Figure B5 Stansted 2022 average summer day movements by ANCON type

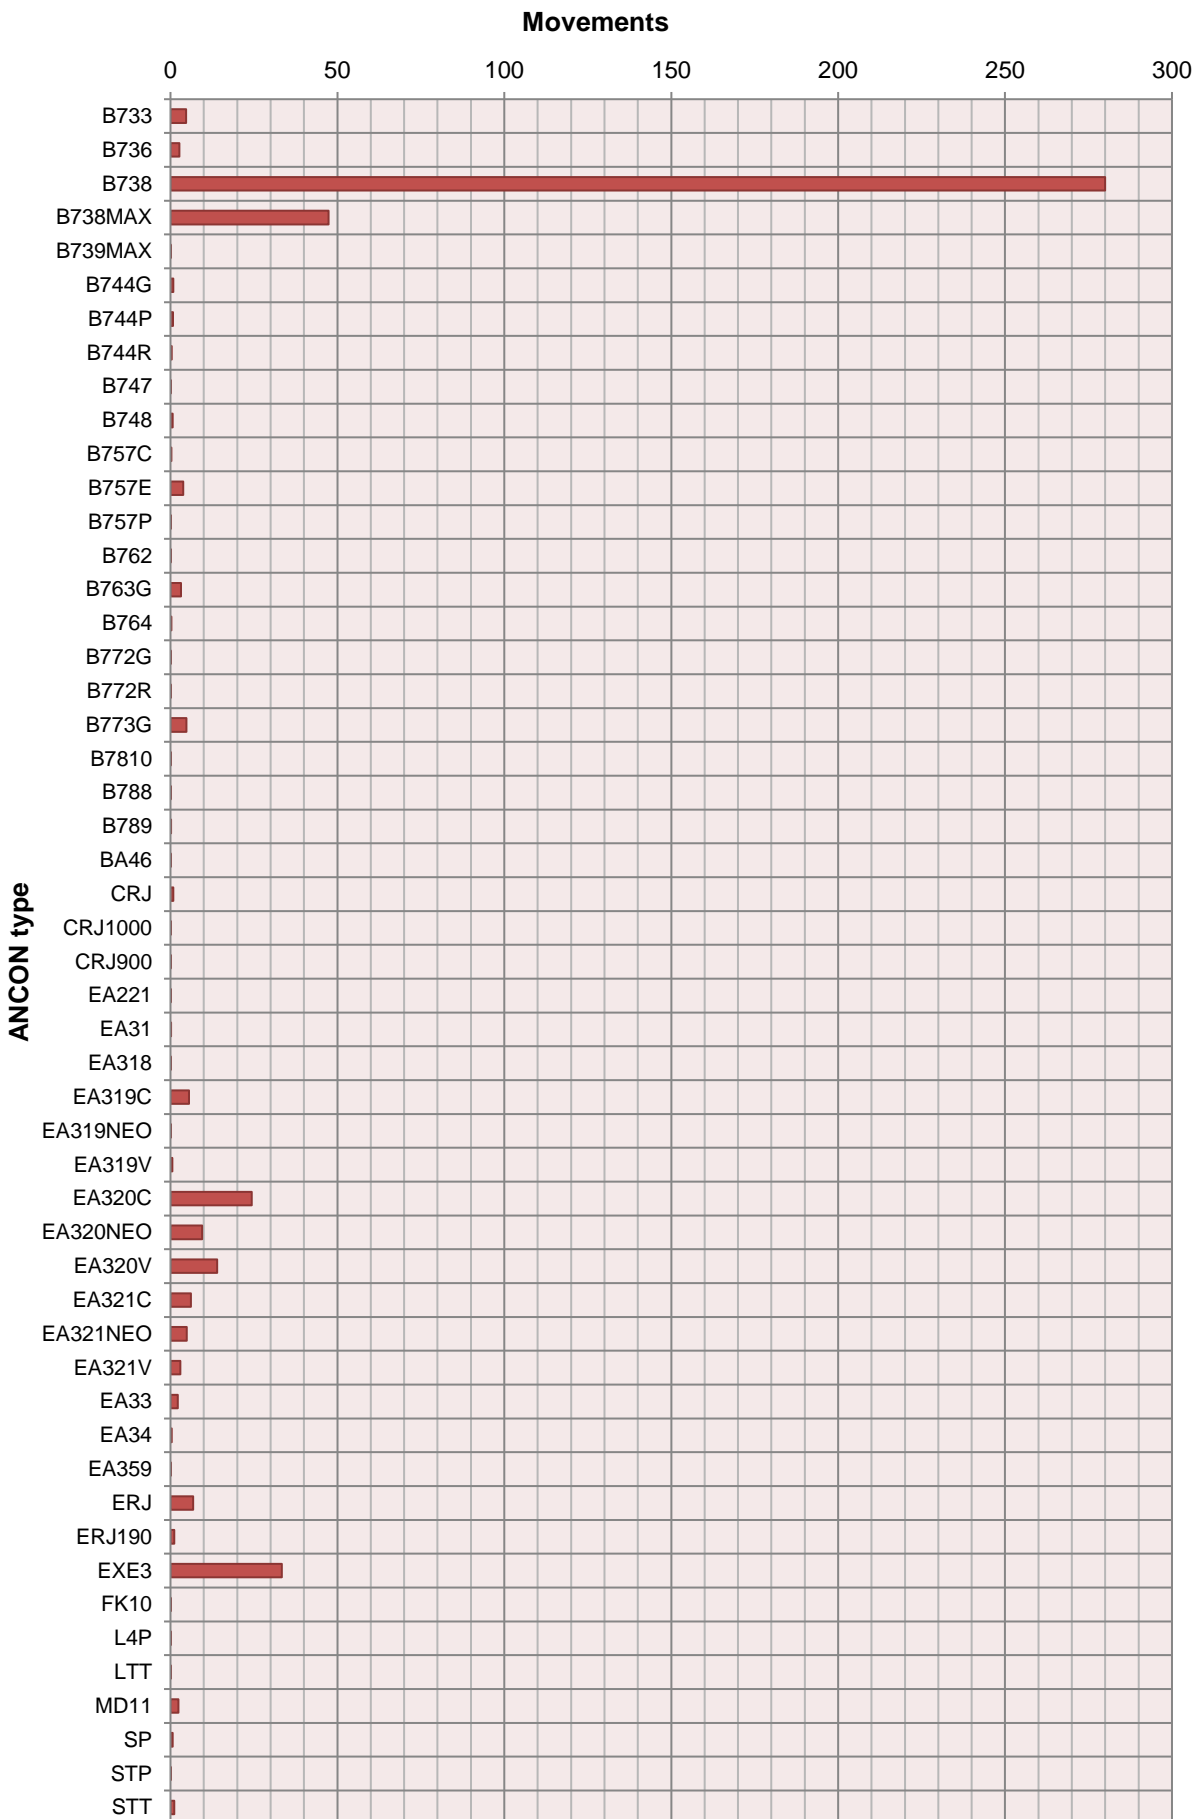


Figure B6 Stansted 2022 average summer night movements by ANCON type

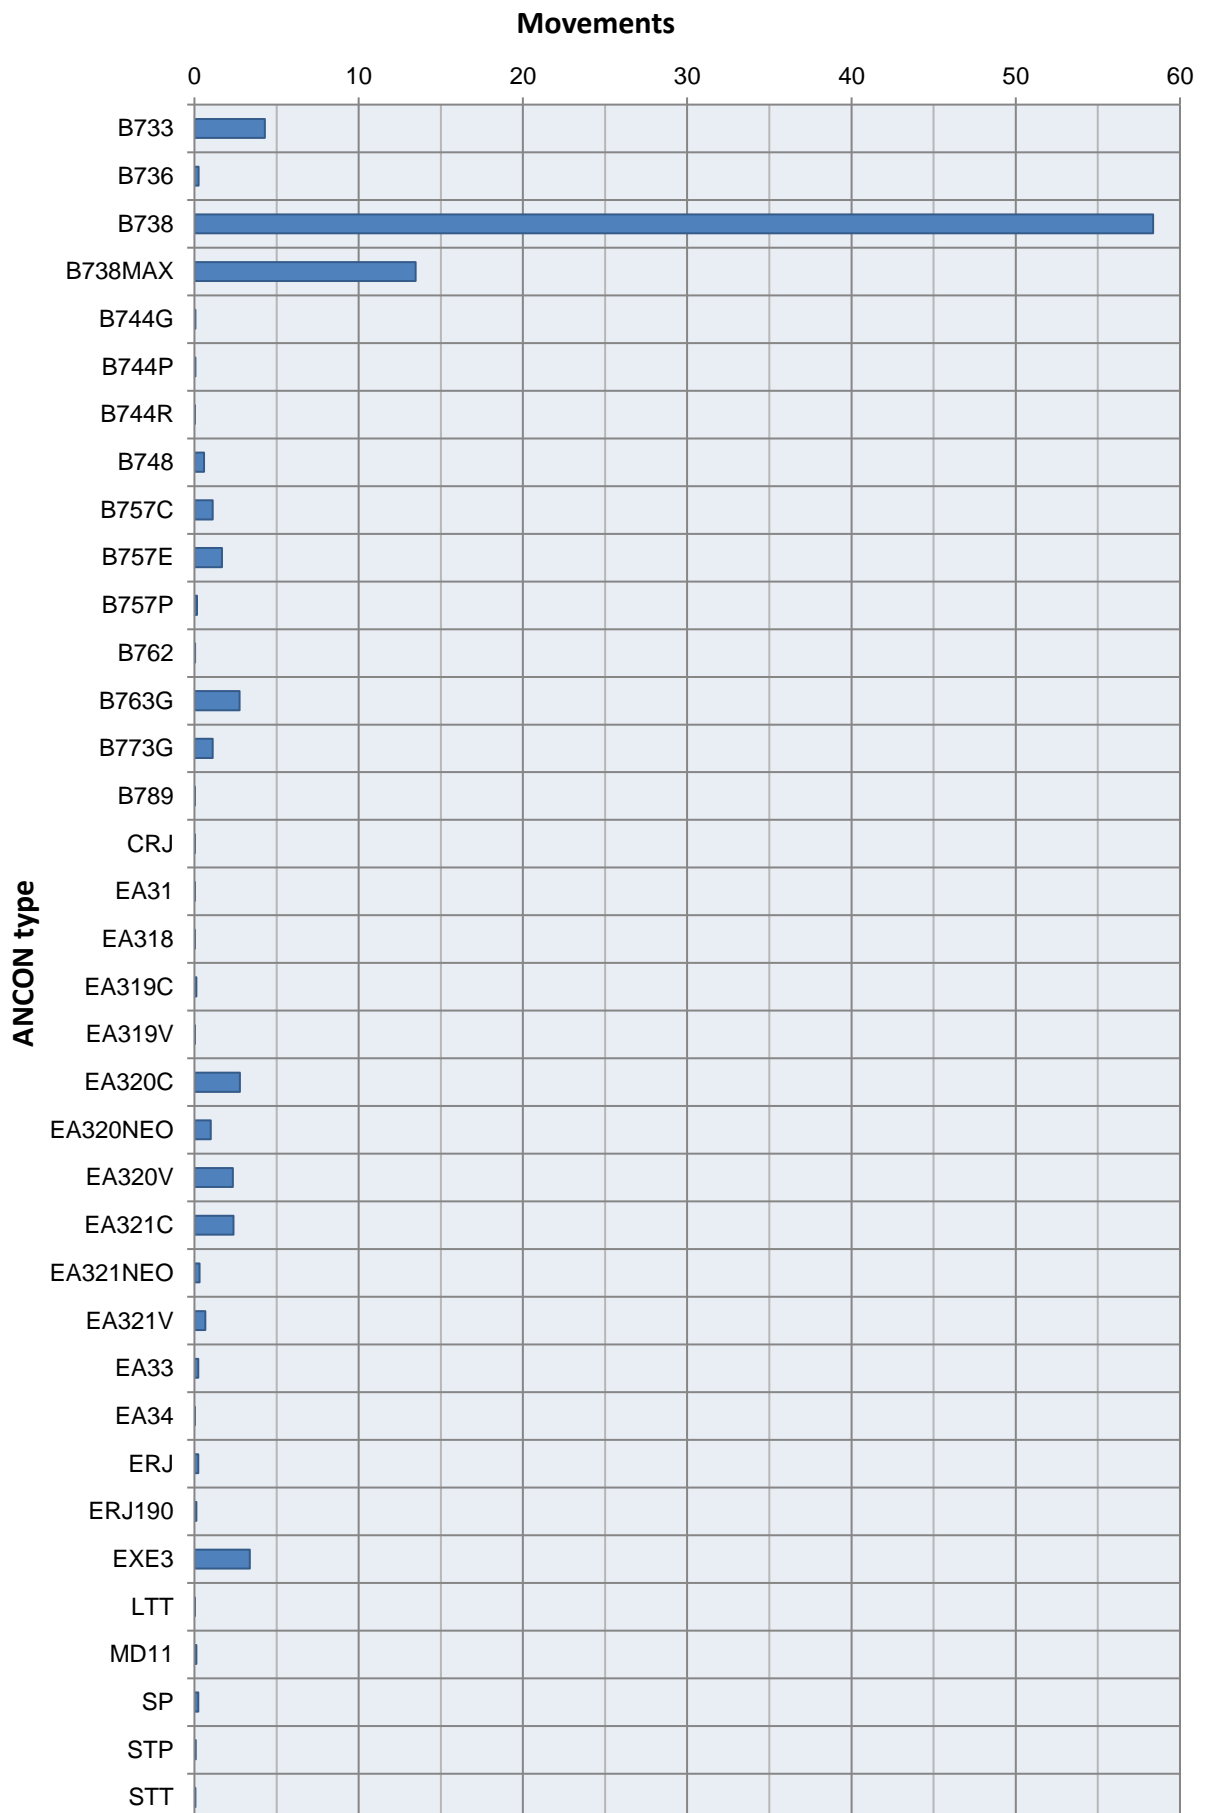


Figure B7 Stansted 2022 summer day departure traffic distributions by NPR/SID

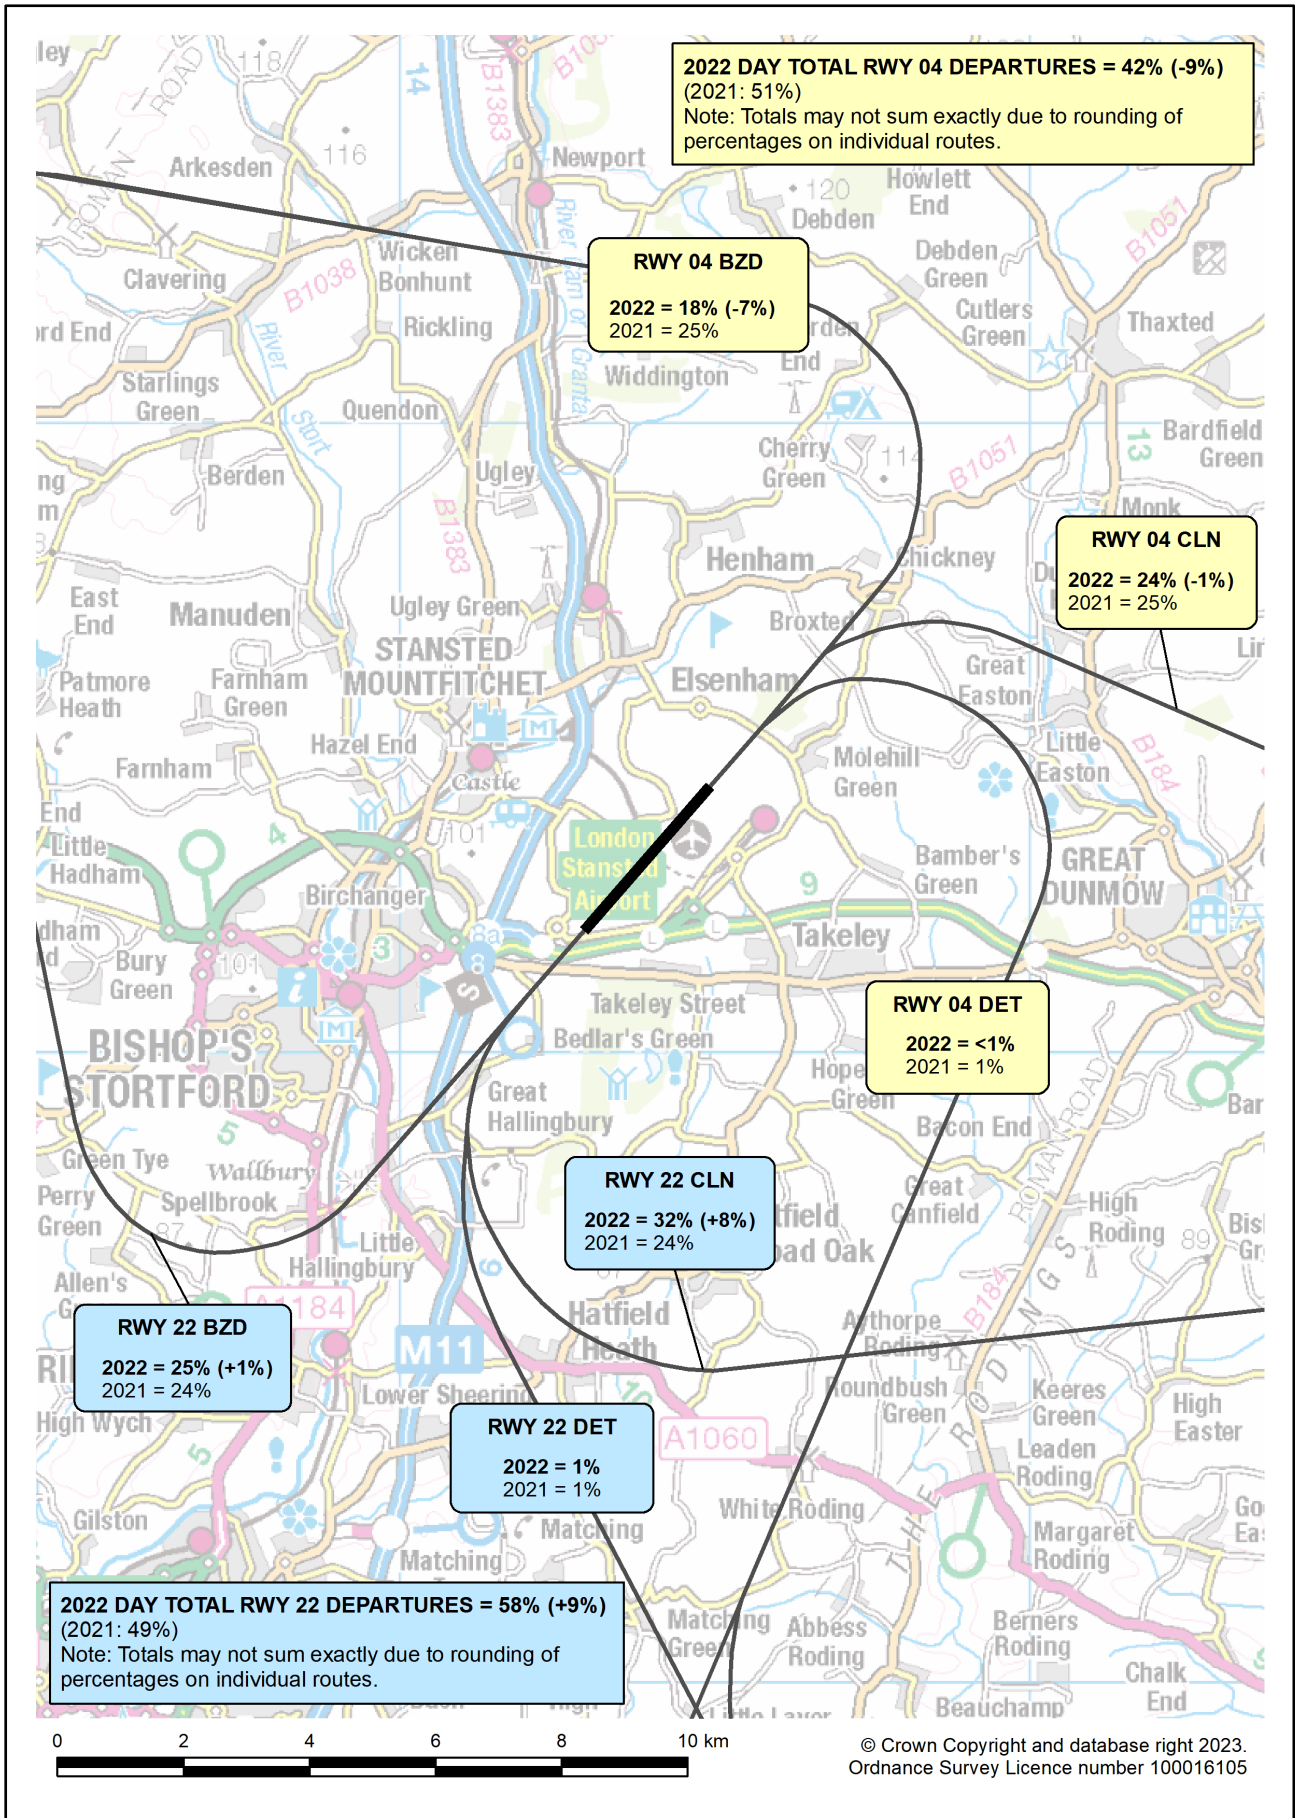


Figure B8 Stansted 2022 summer night departure traffic distributions by NPR/SID

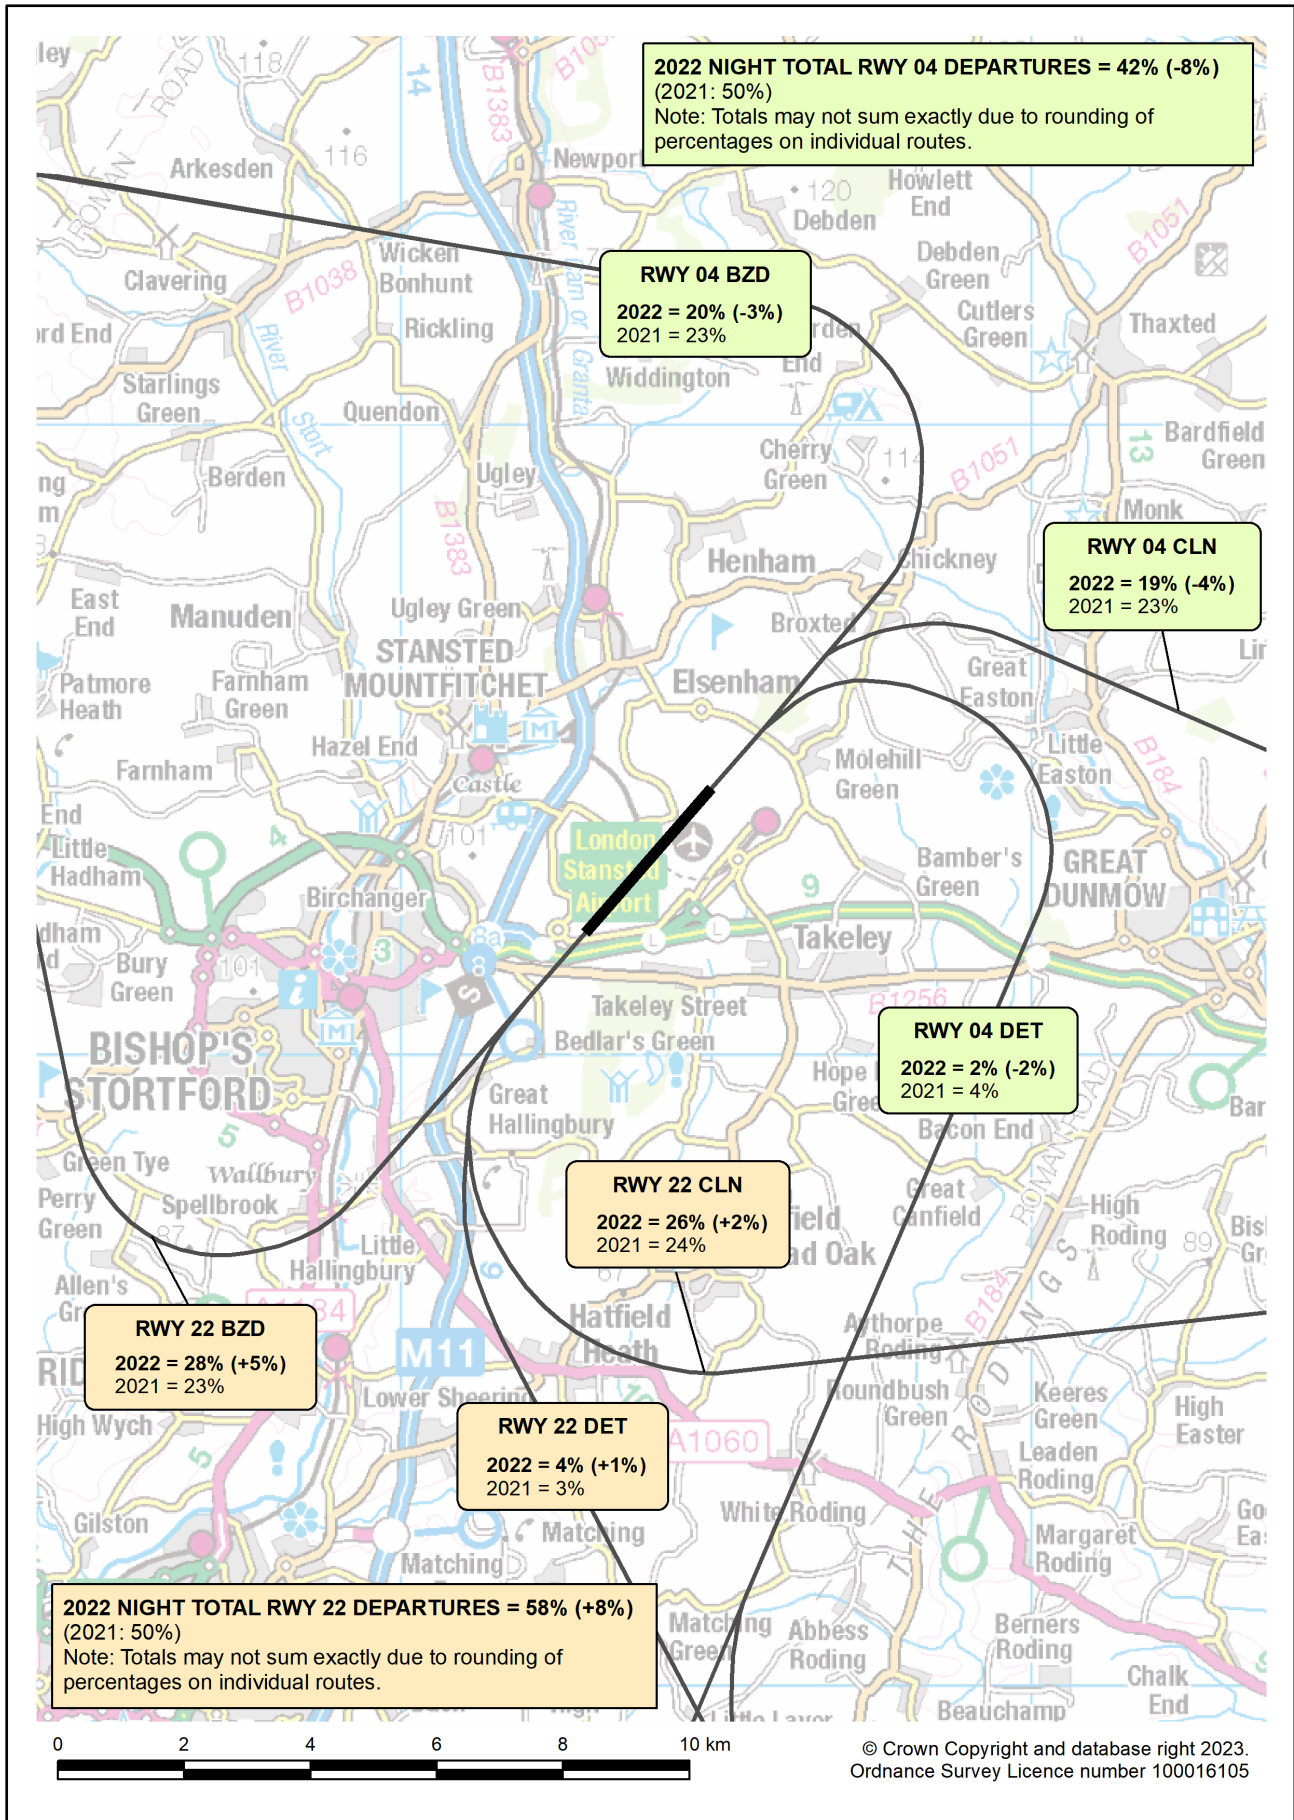


Figure B9 Stansted summer day runway modal splits 2003-2022

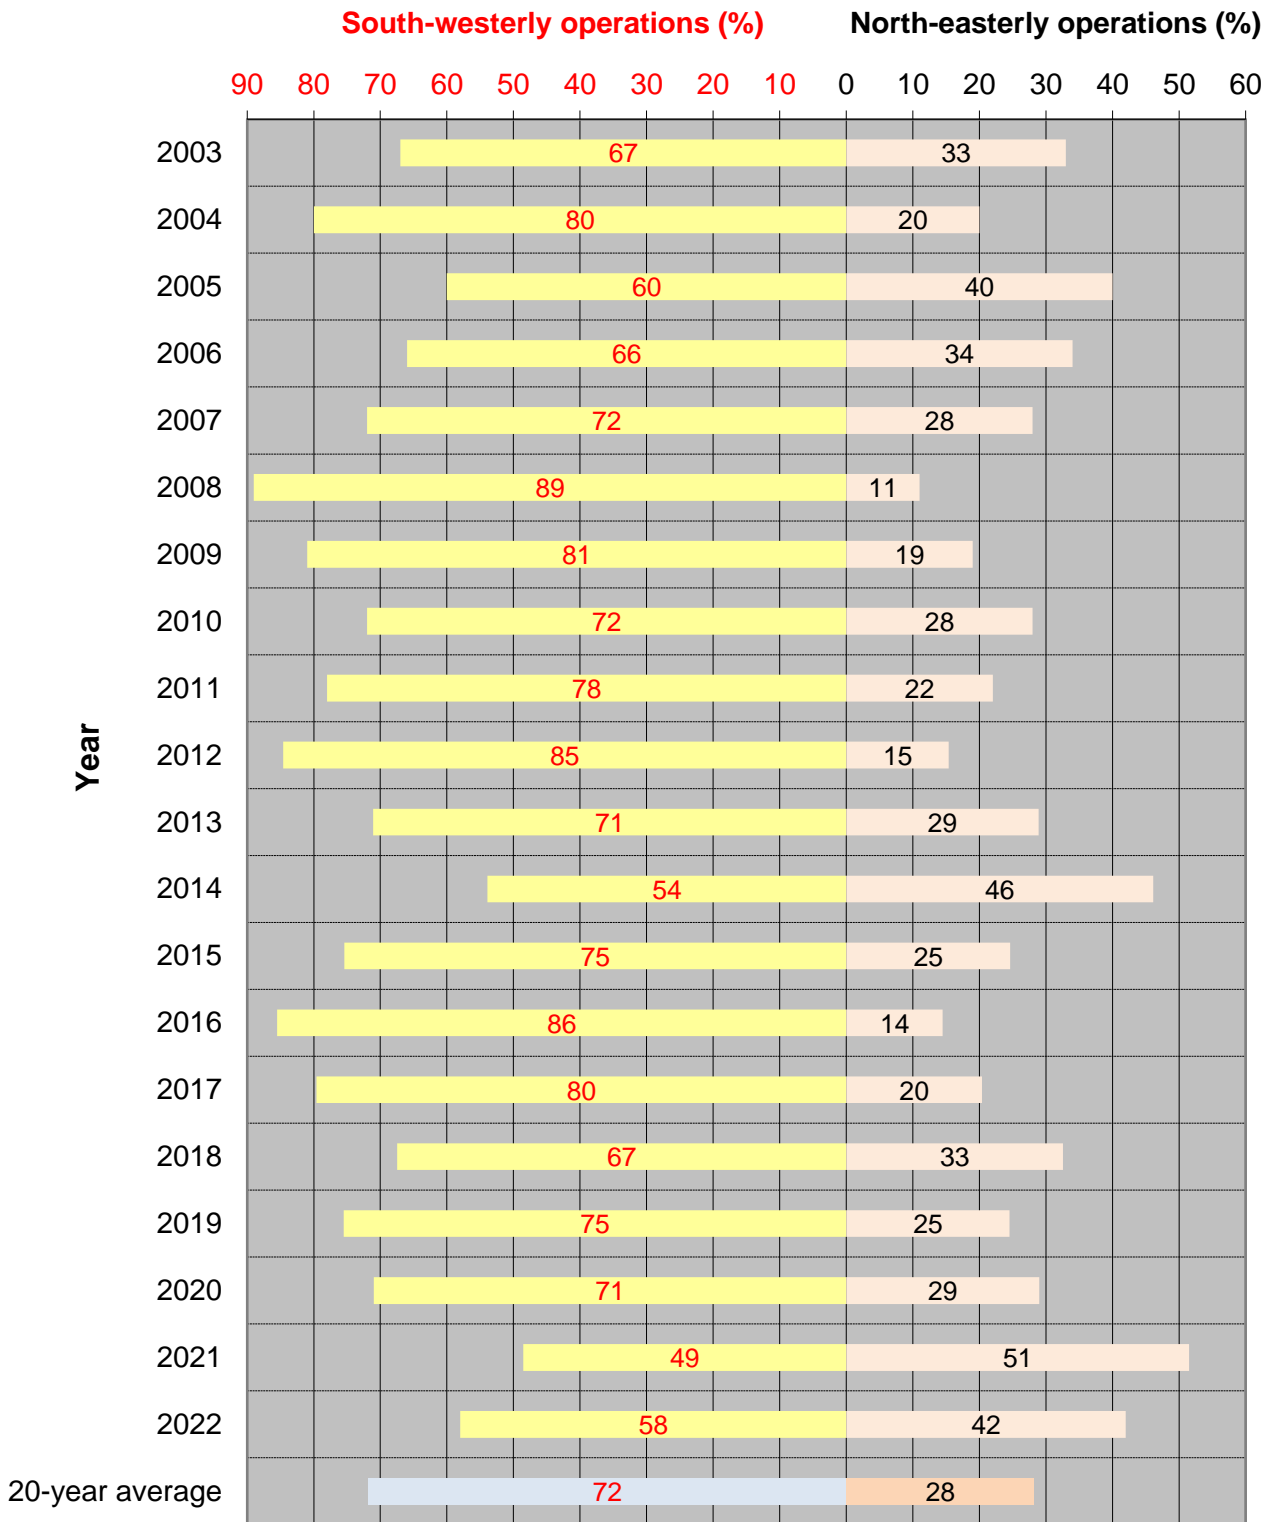


Figure B10 Terrain heights around Stansted Airport

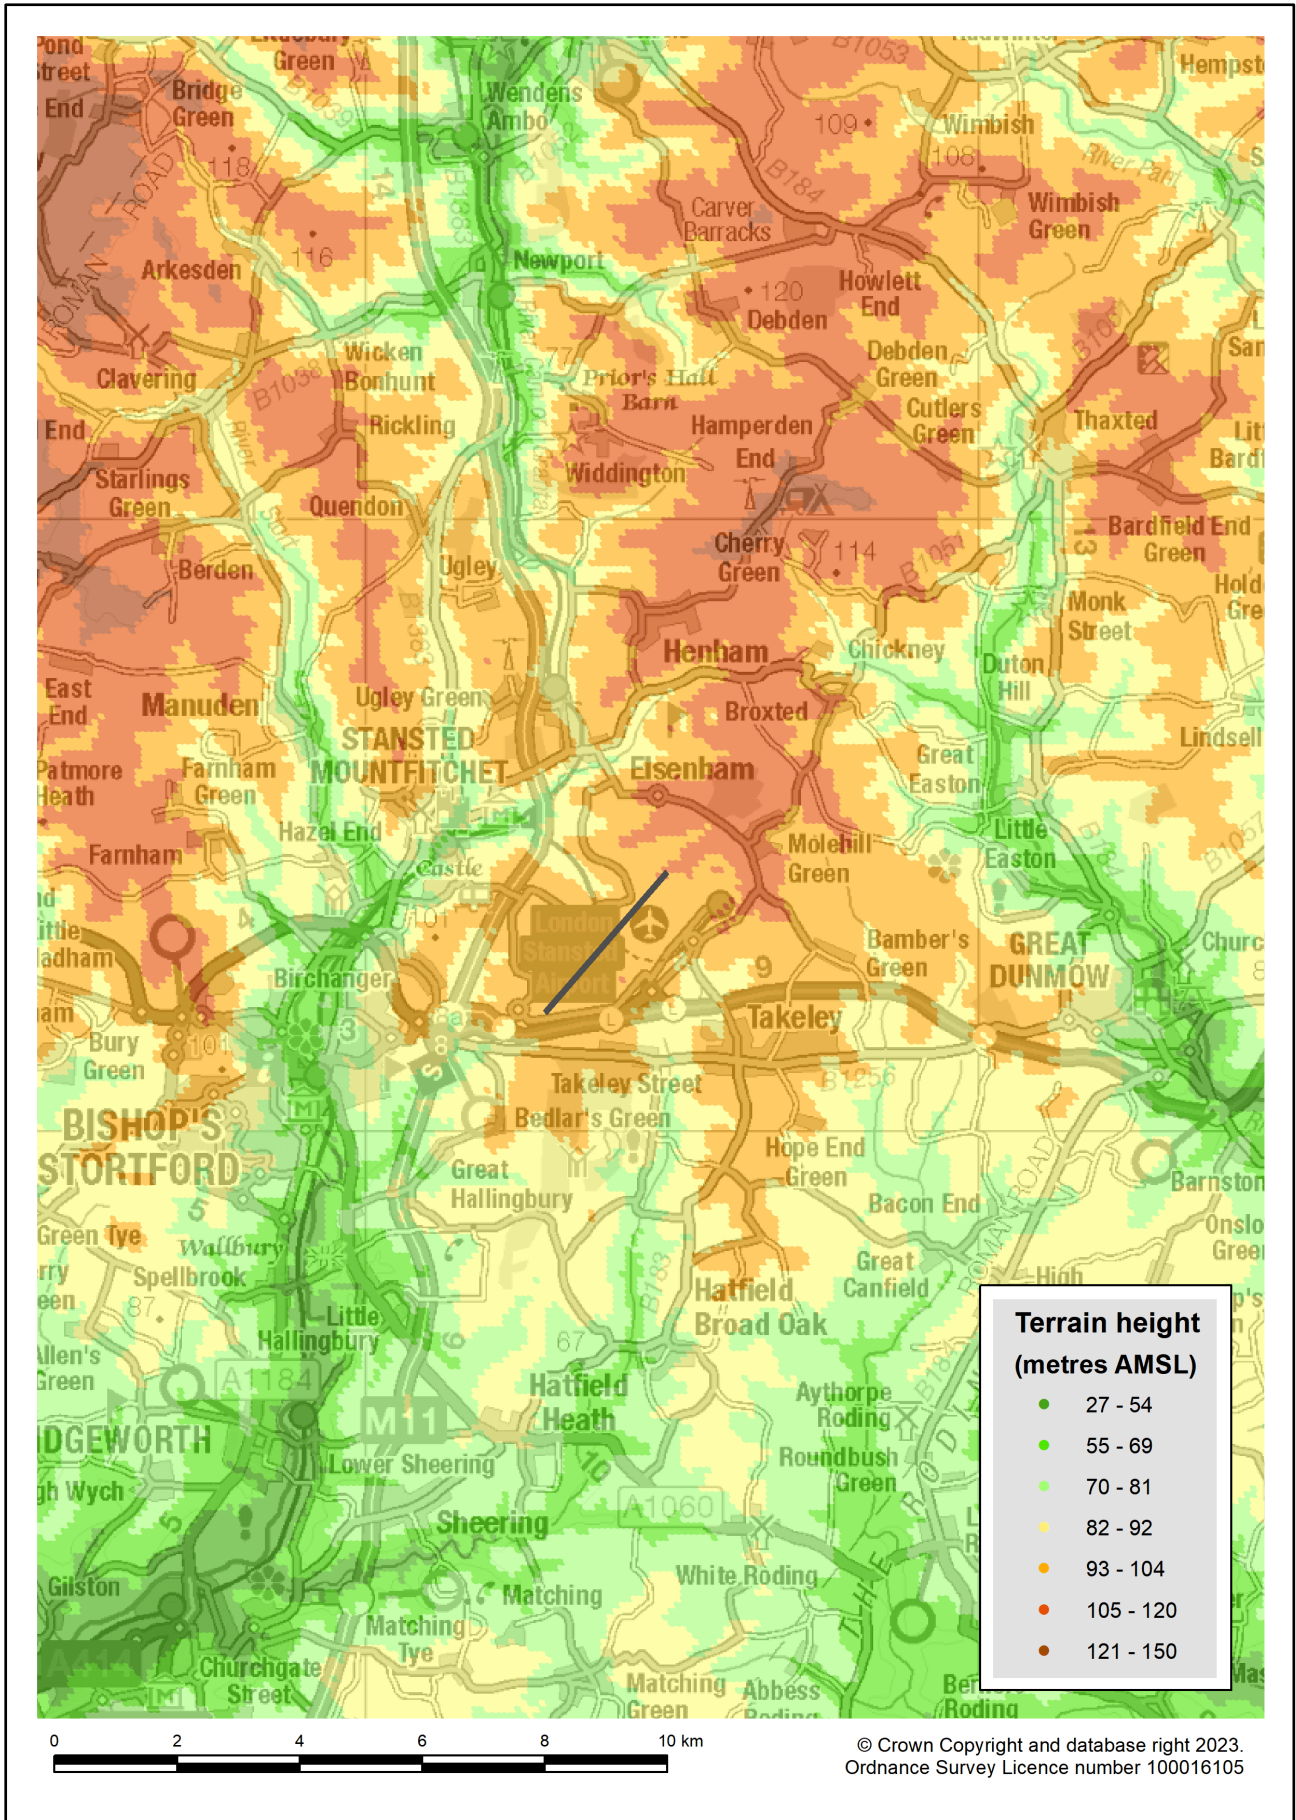


Figure B11 Population data points around Stansted Airport

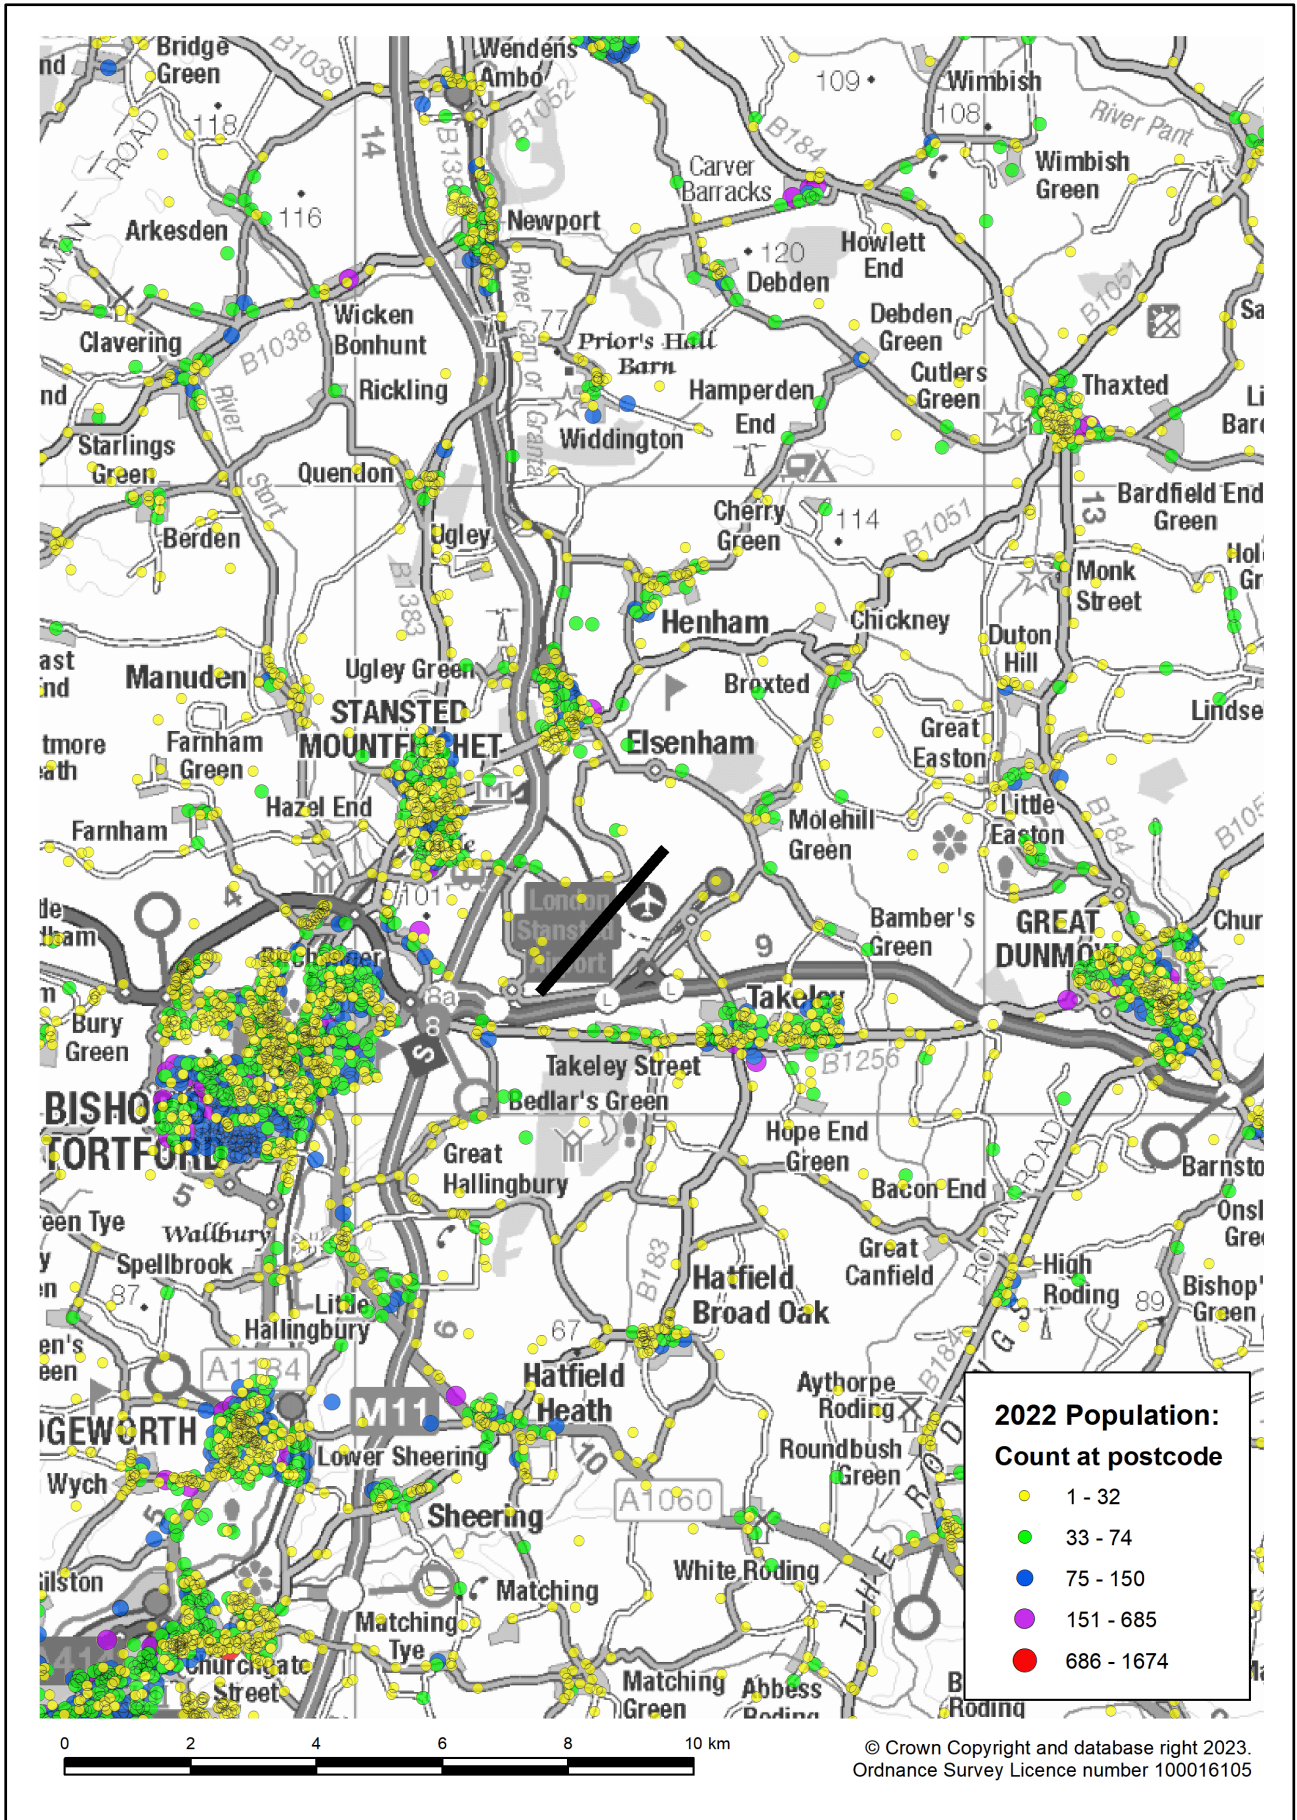


Figure B12 Stansted 2022 summer day actual modal split (58% SW / 42% NE) $L_{Aeq,16h}$ contours

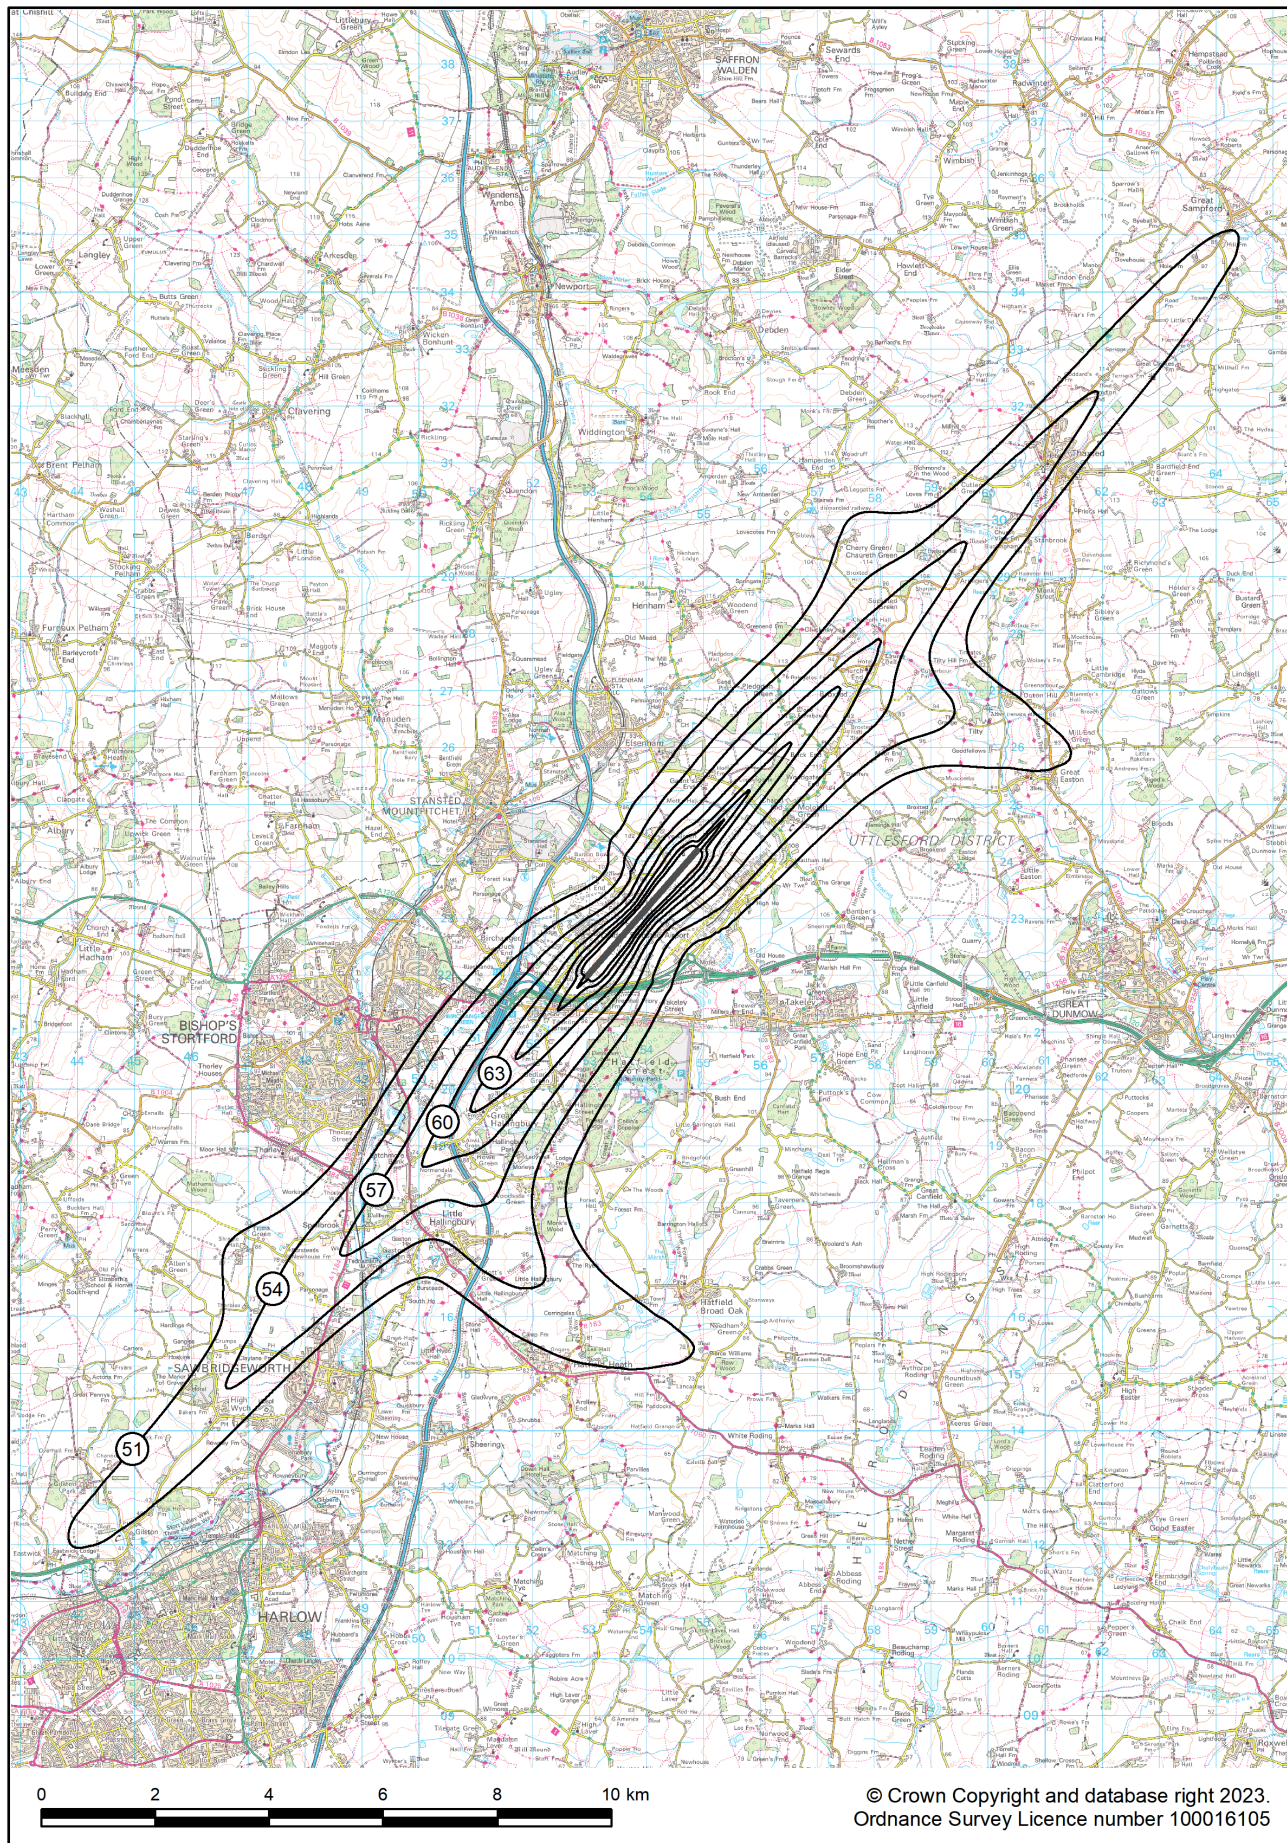


Figure B13 Stansted 2022 summer night actual modal split (59% SW / 41% NE) $L_{Aeq,8h}$ contours

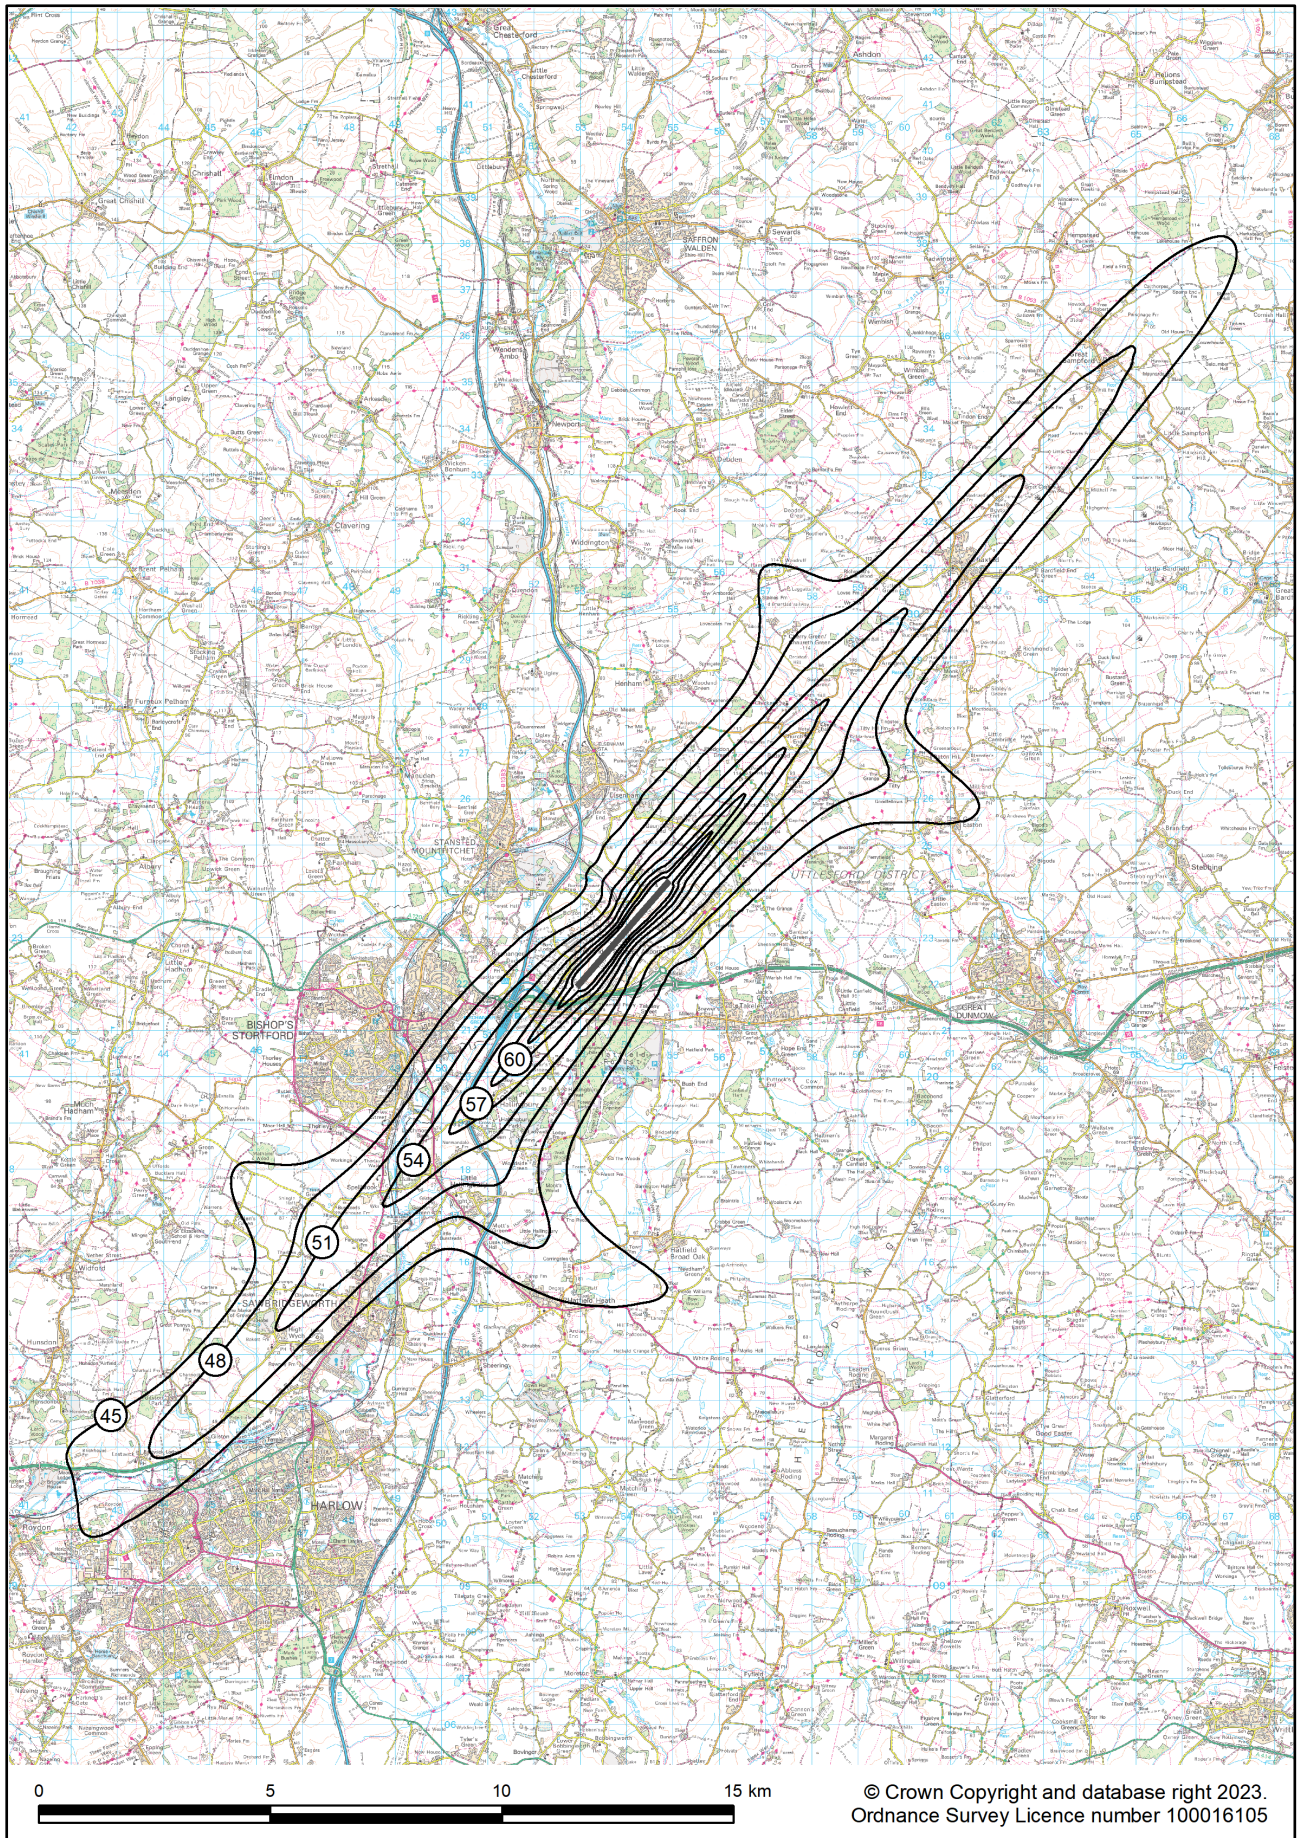


Figure B14 Stansted 2022 summer day standard modal split (72% SW / 28% NE) $L_{Aeq,16h}$ contours

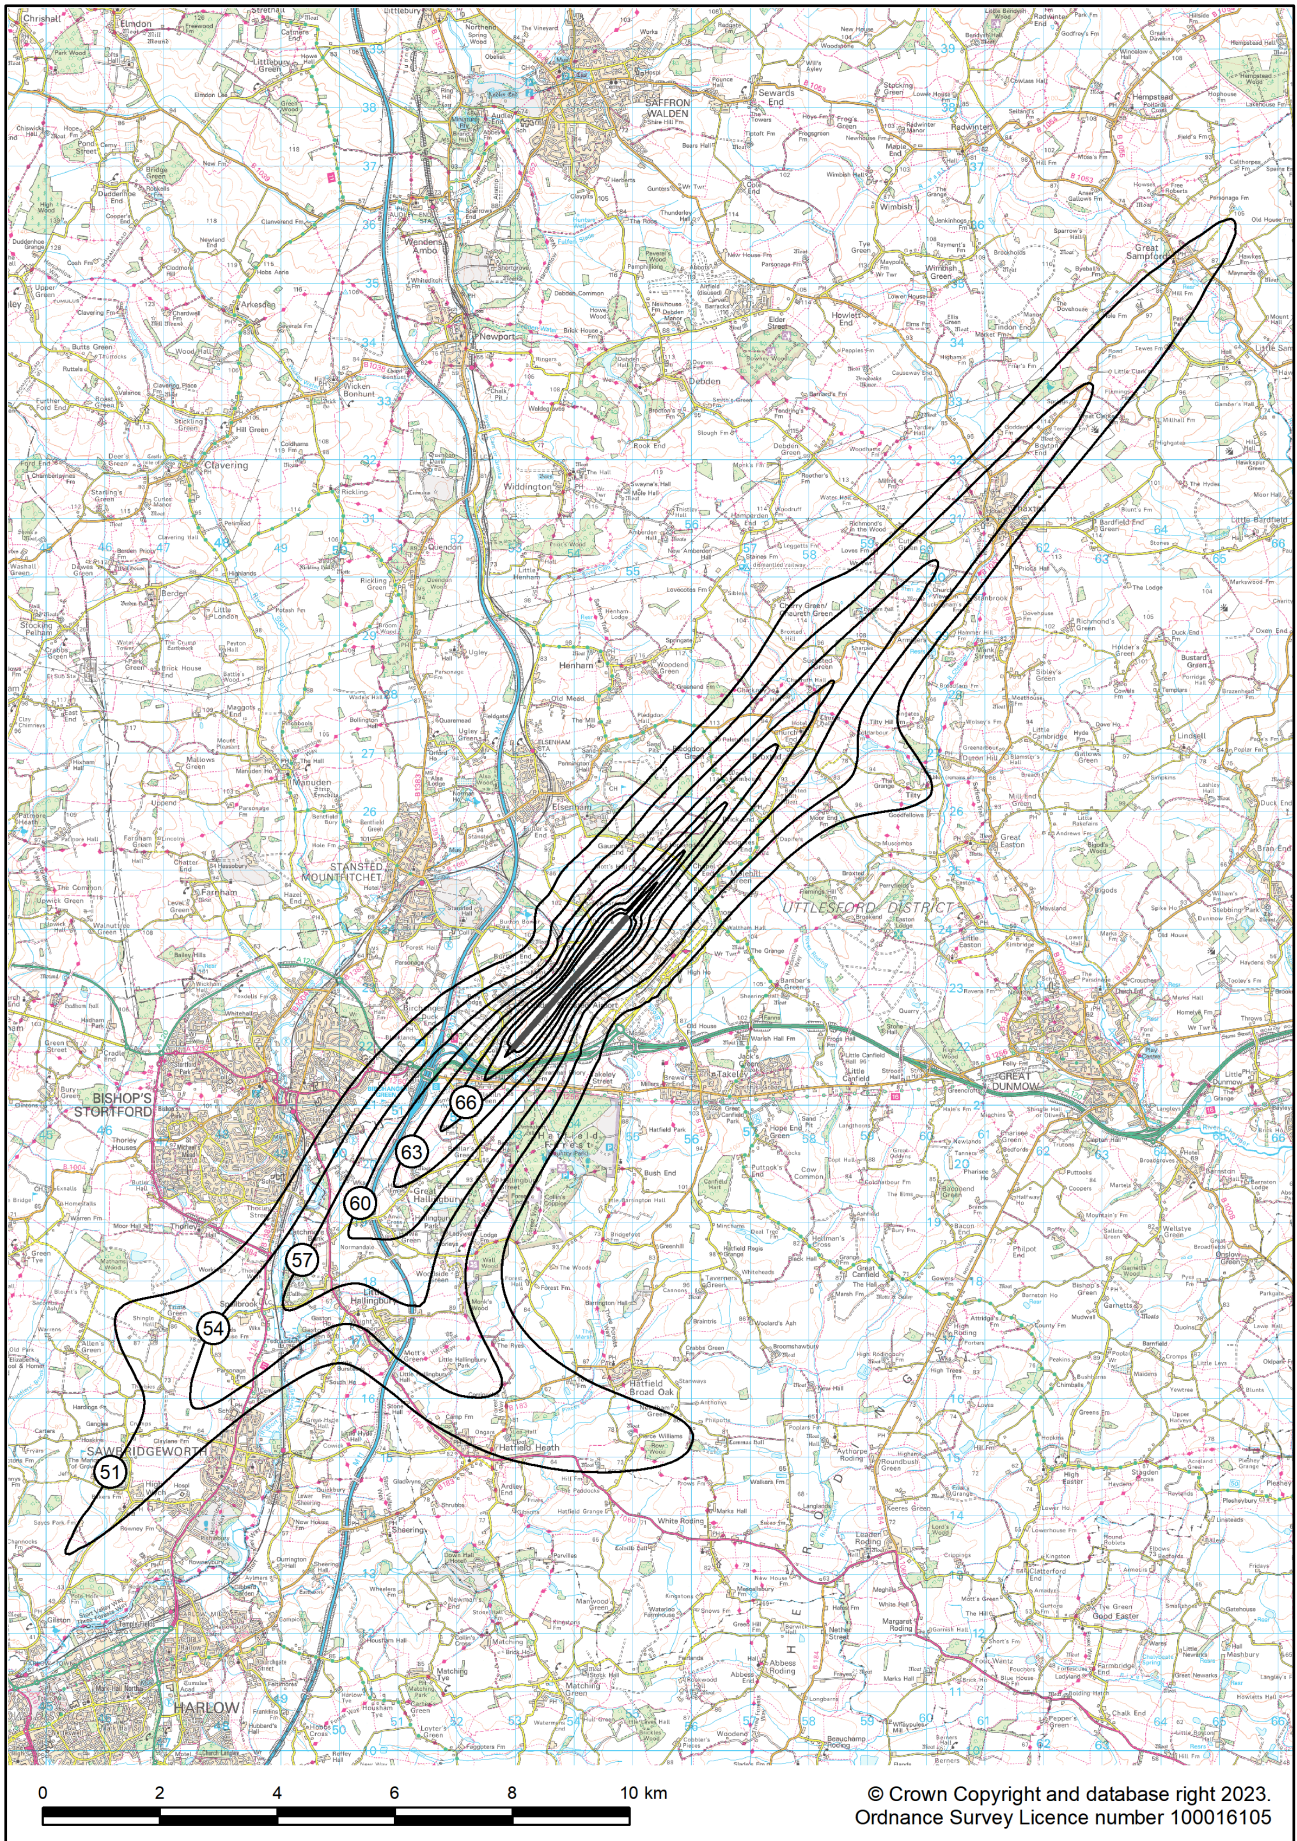


Figure B15 Stansted 2022 summer night standard modal split (70% SW / 30% NE) $L_{Aeq,8h}$ contours

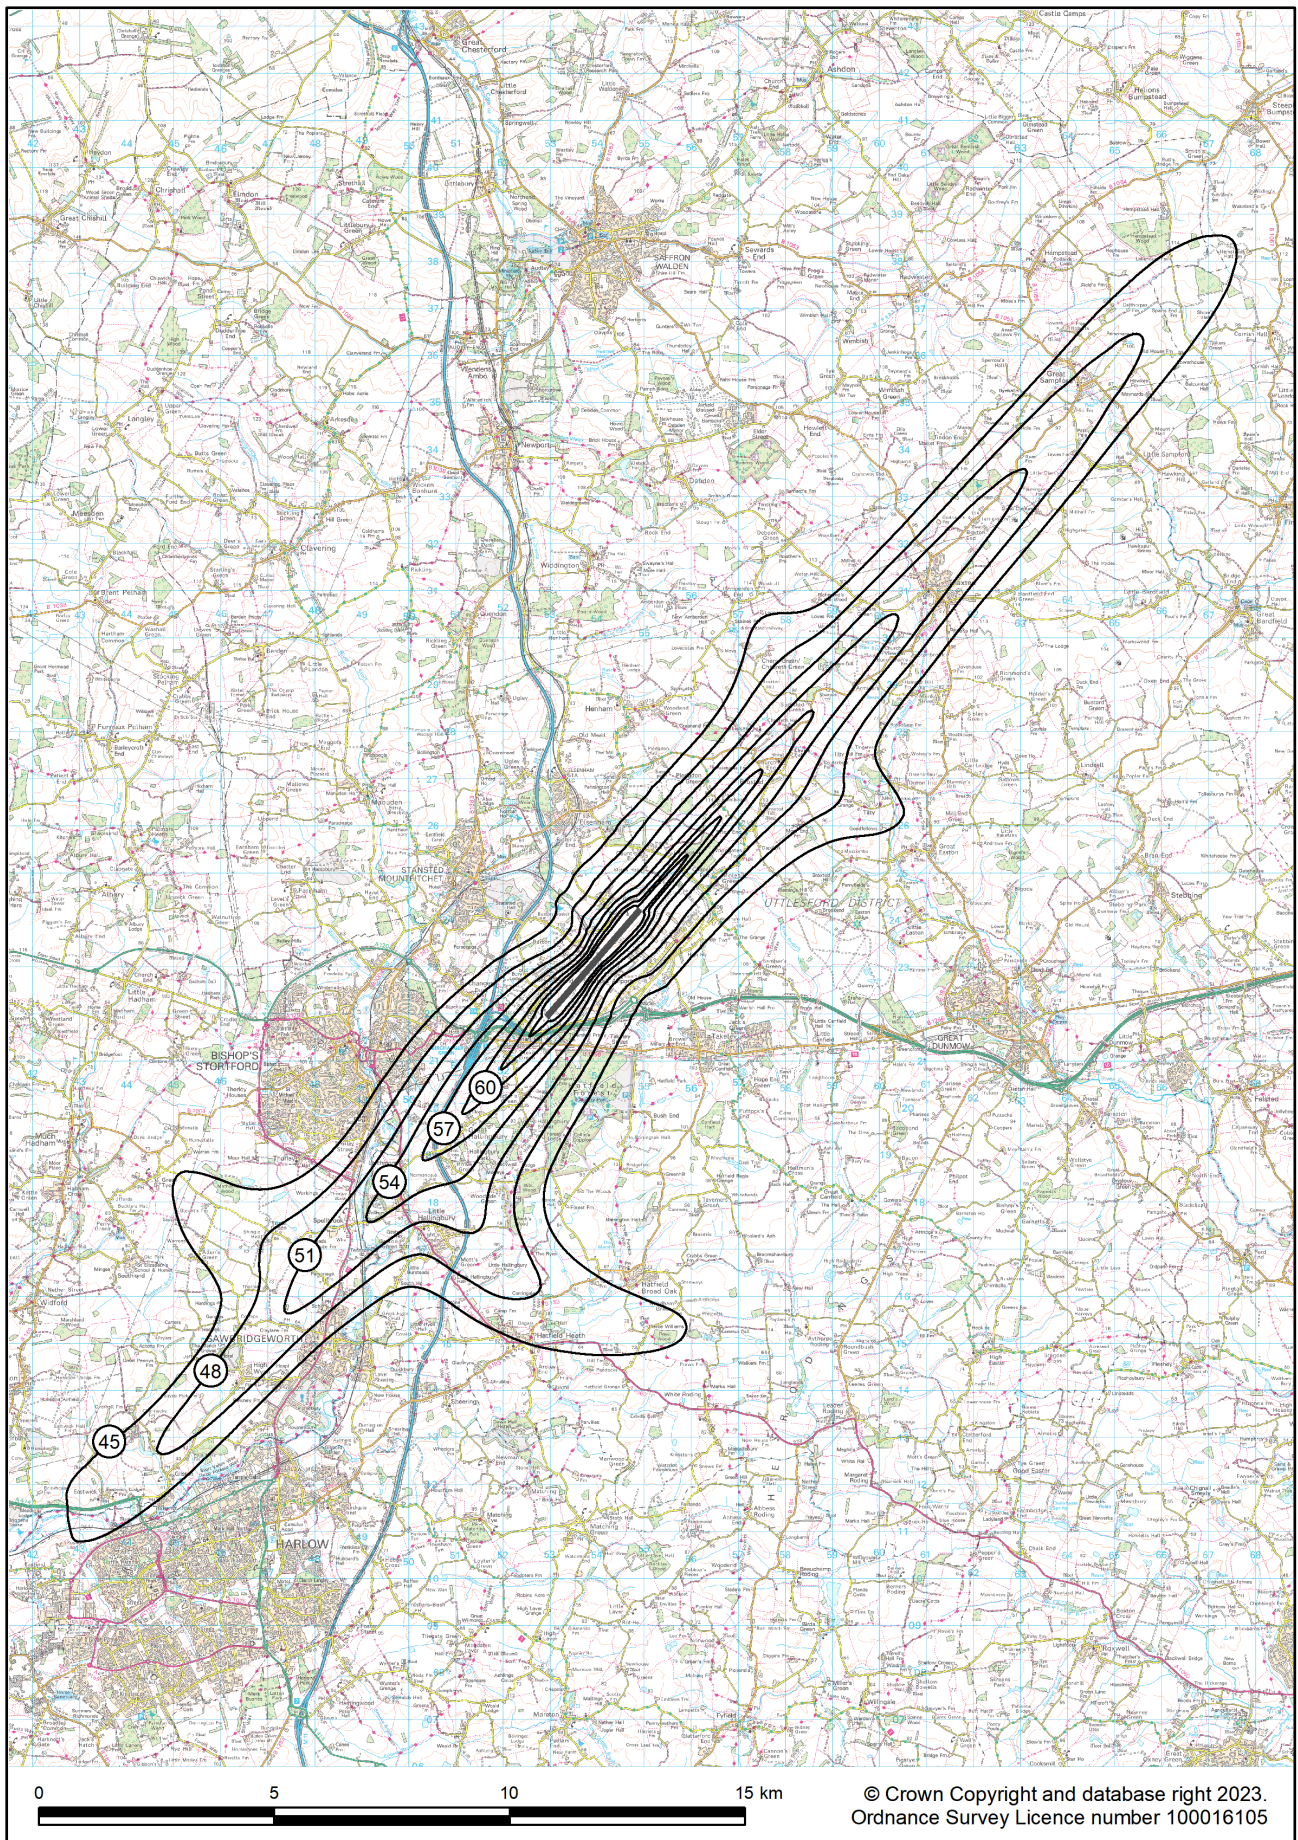


Figure B16 Stansted summer day actual modal split 2022 (58% SW / 42% NE) and 2021 (49% SW / 51% NE) $L_{Aeq,16h}$ contours

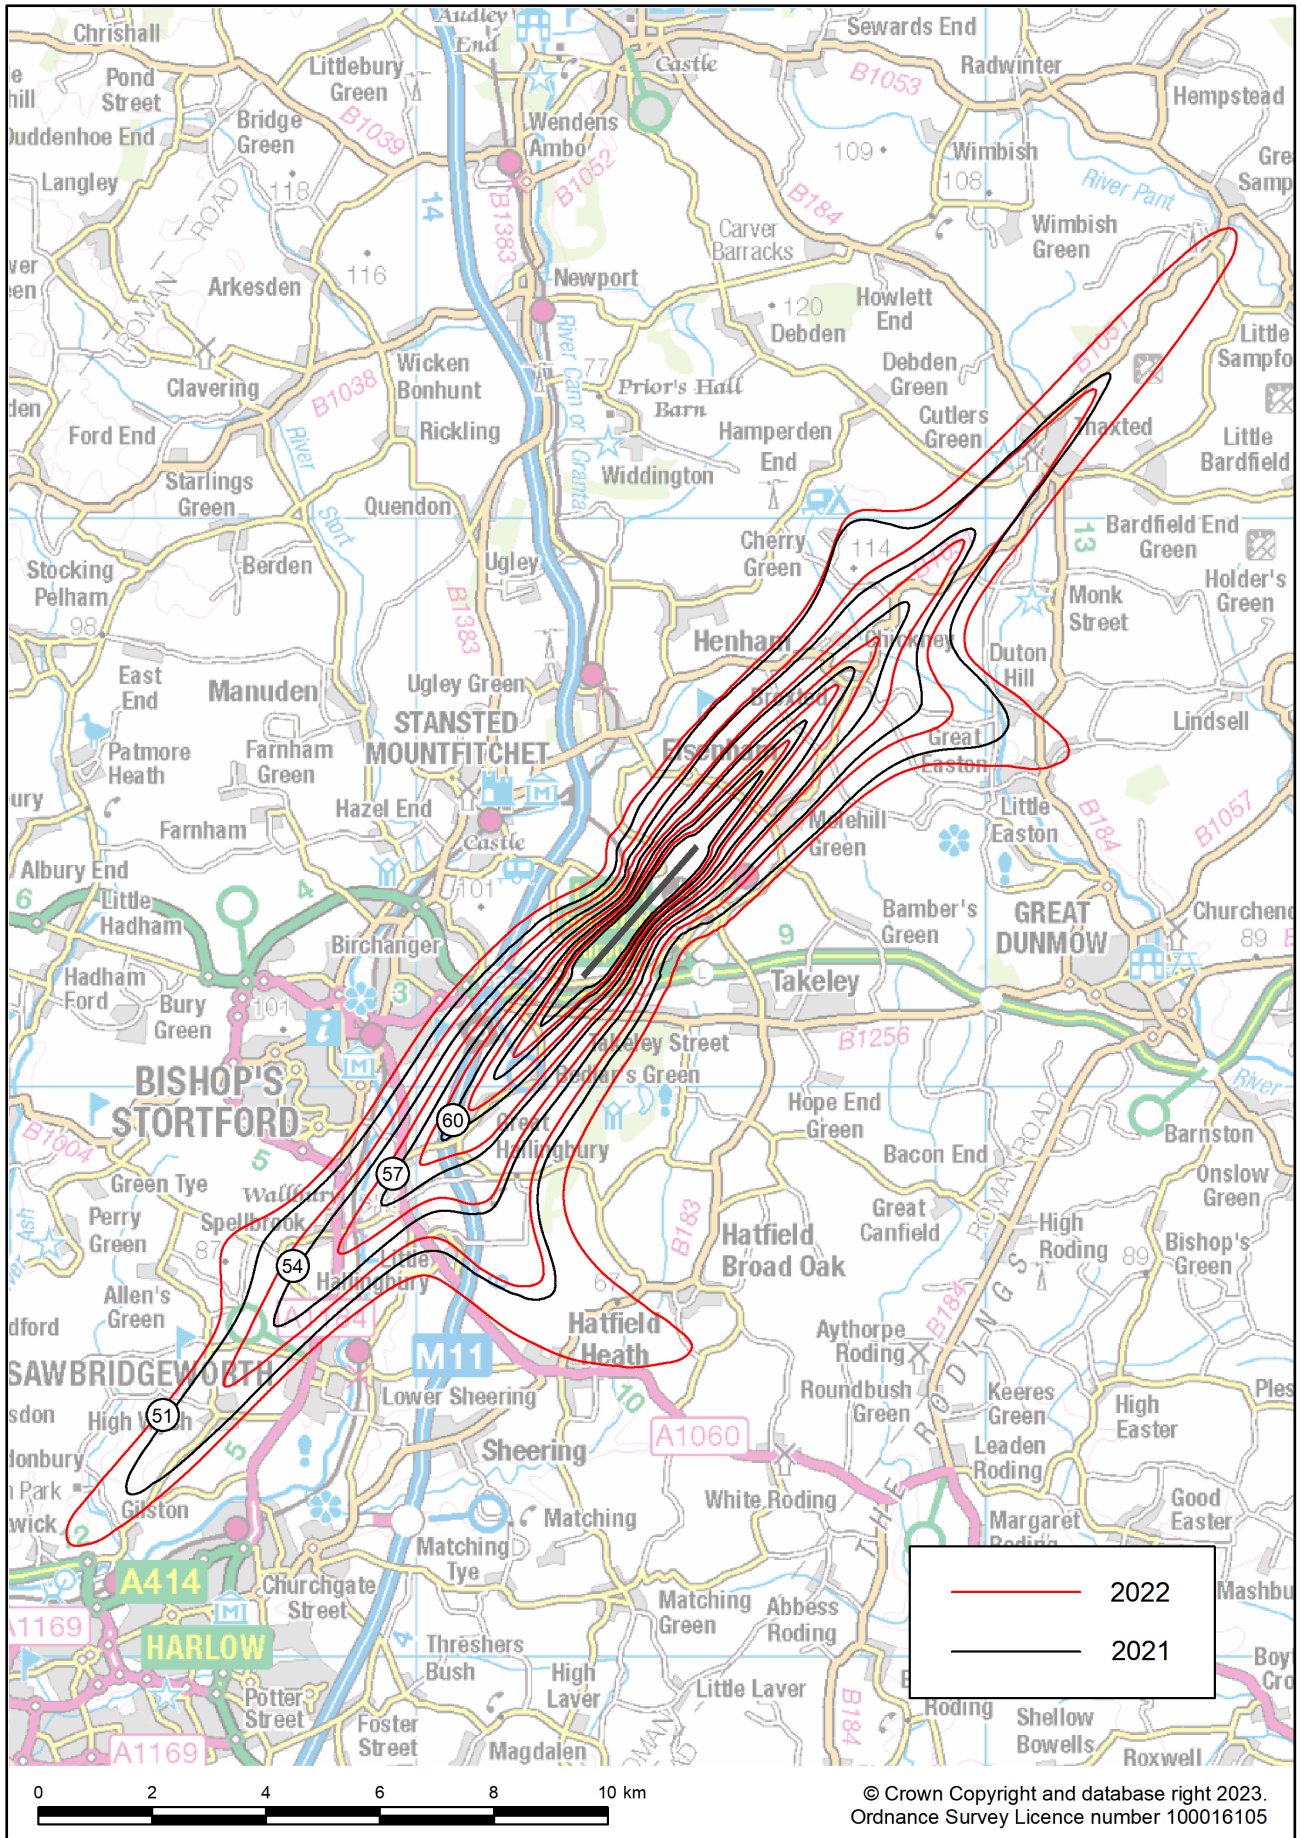


Figure B17 Stansted summer night actual modal split 2022 (59% SW / 41% NE) and 2021 (49% SW / 51% NE) $L_{Aeq,8h}$ contours

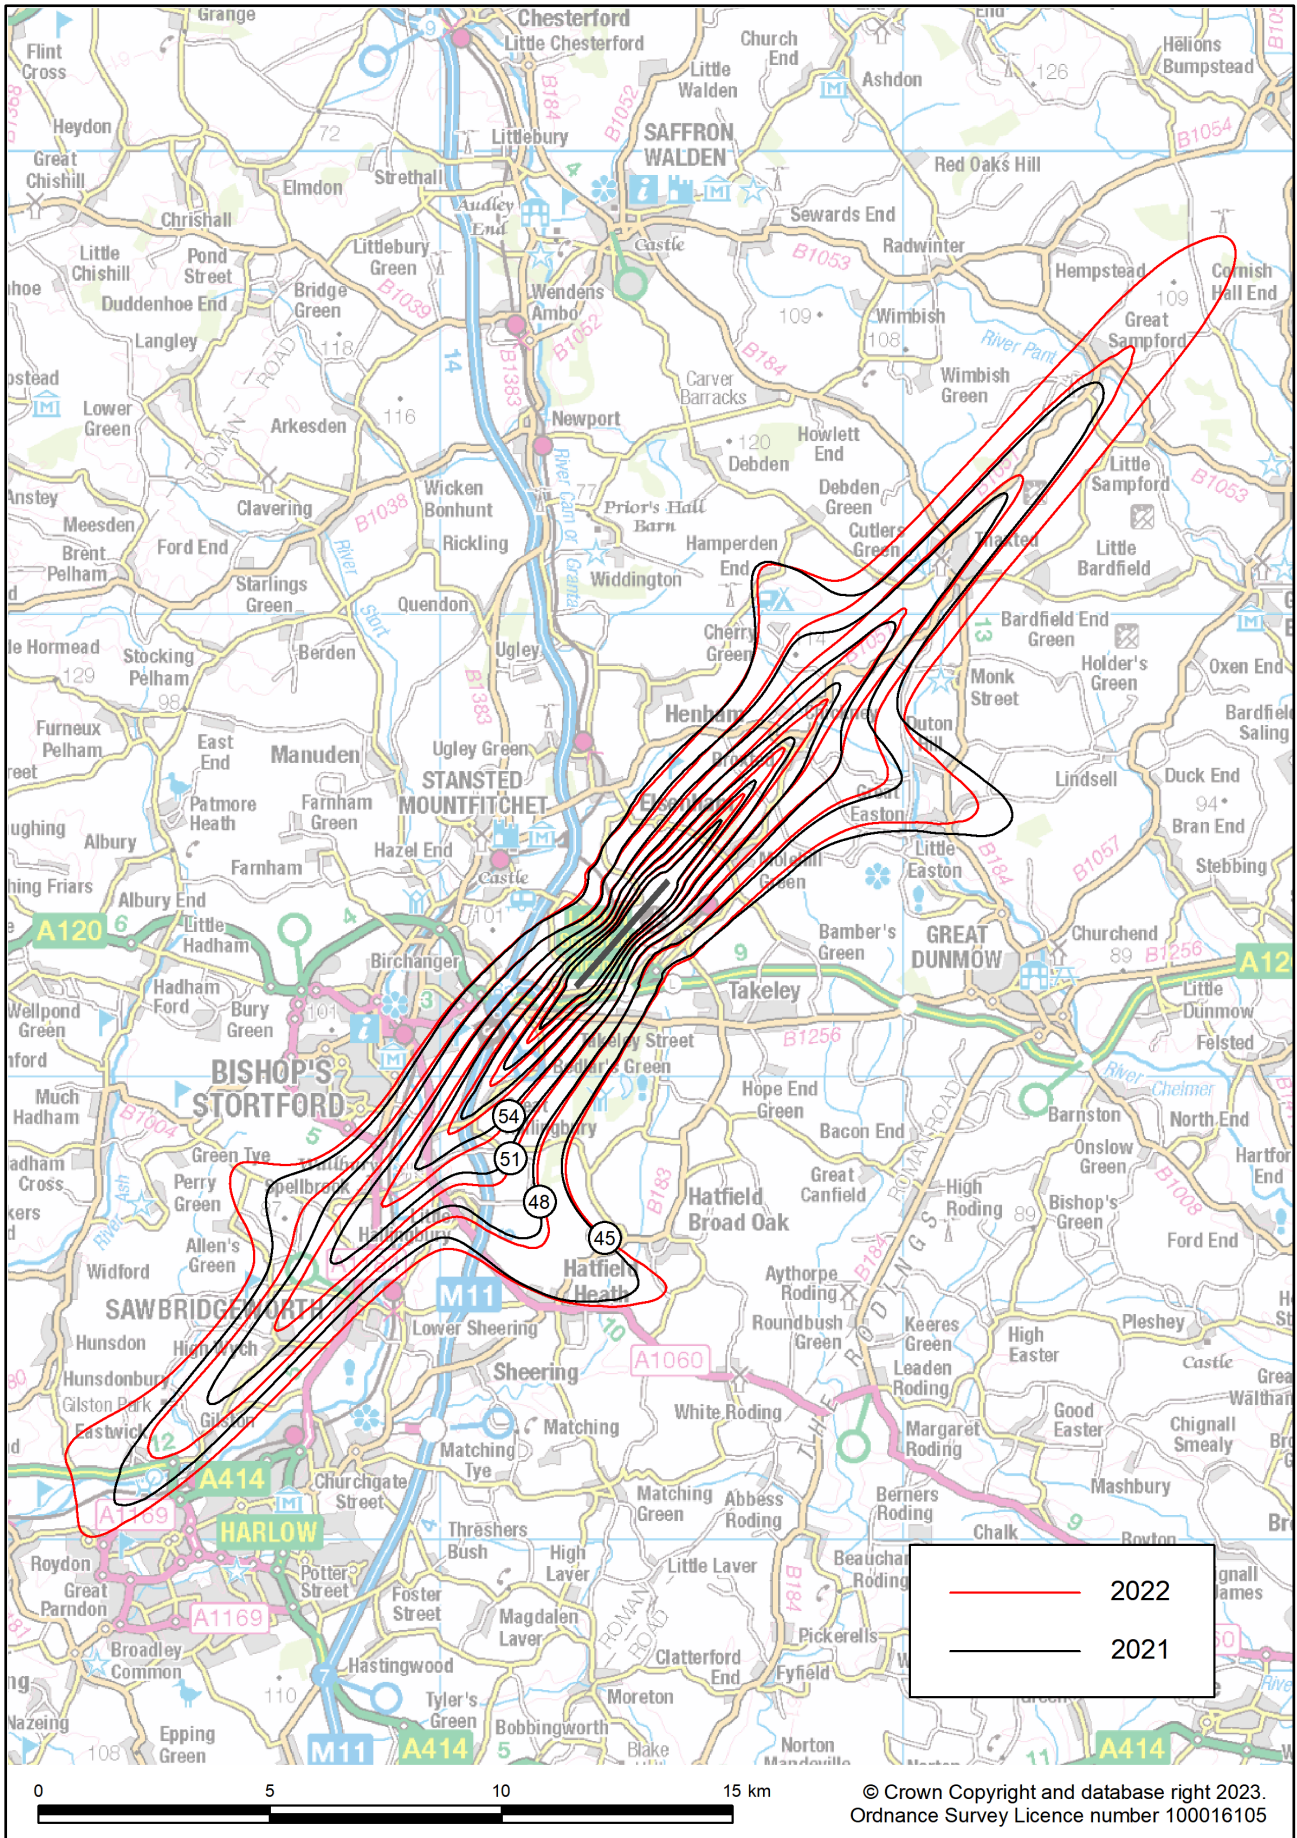


Figure B19 Stansted summer night standard modal split 2022 (70% SW / 30% NE) and 2021 (70% SW / 30% NE) $L_{Aeq,8h}$ contours

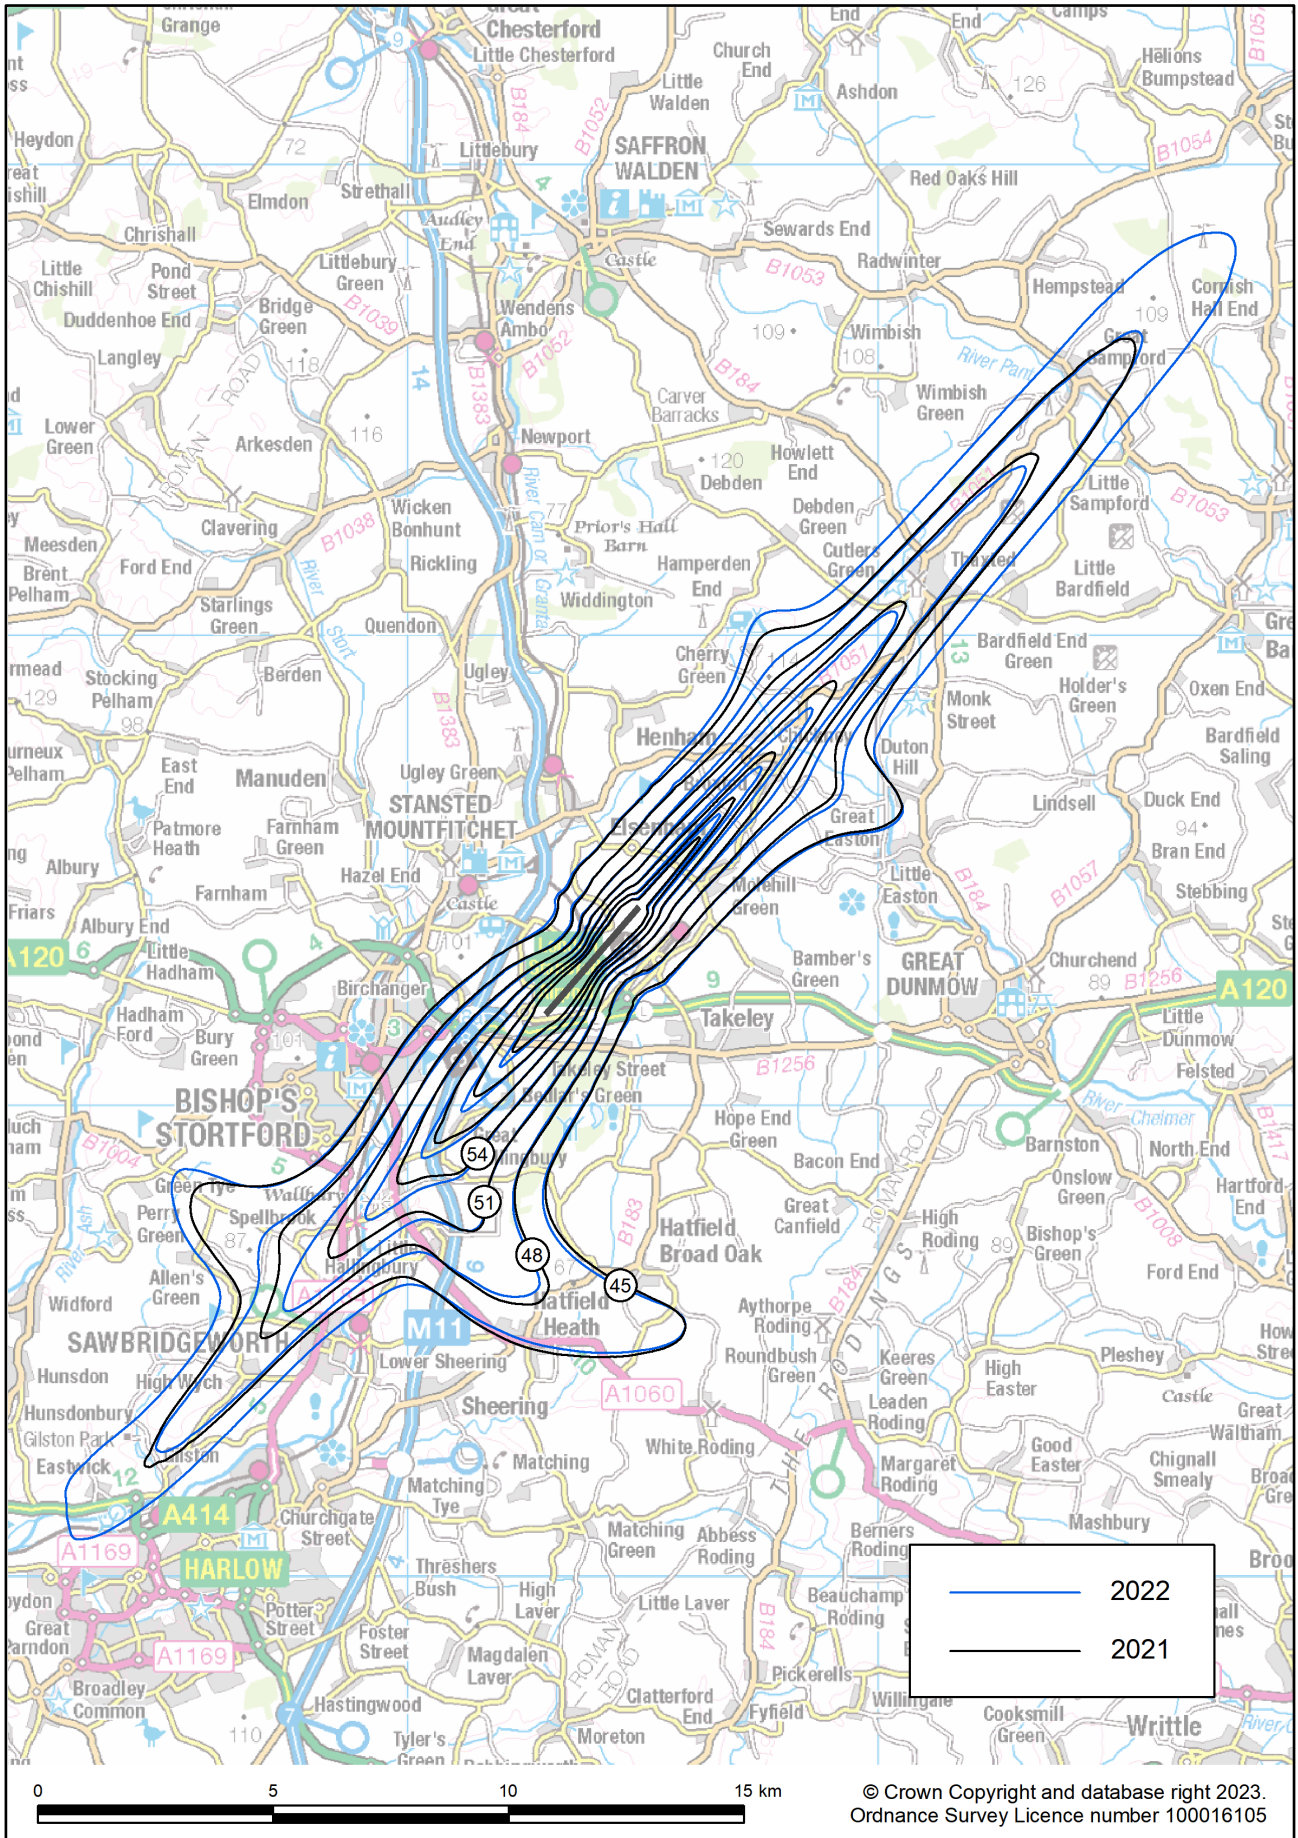


Figure B20 Stansted 1988-2022 annual traffic and summer day $L_{Aeq,16h}$ noise contour area/population trends

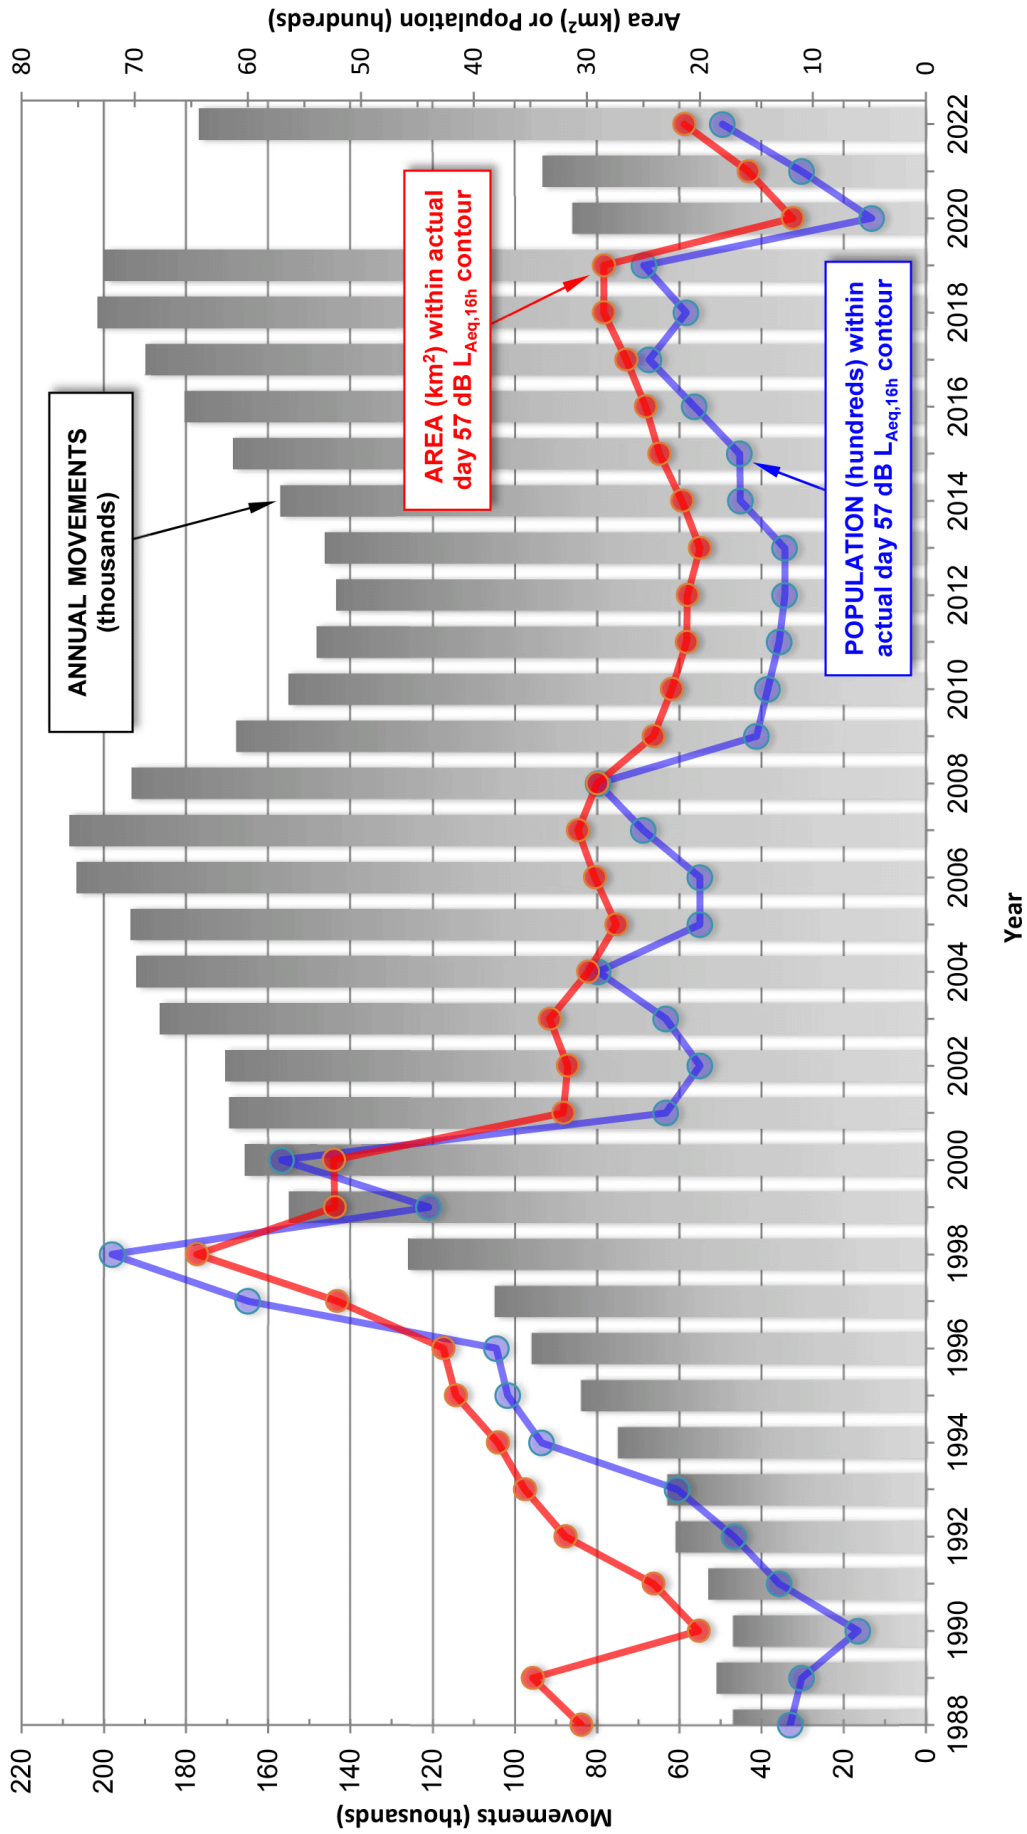


Figure B21 Stansted 2022 summer day actual modal split (58% SW / 42% NE) N65 contours


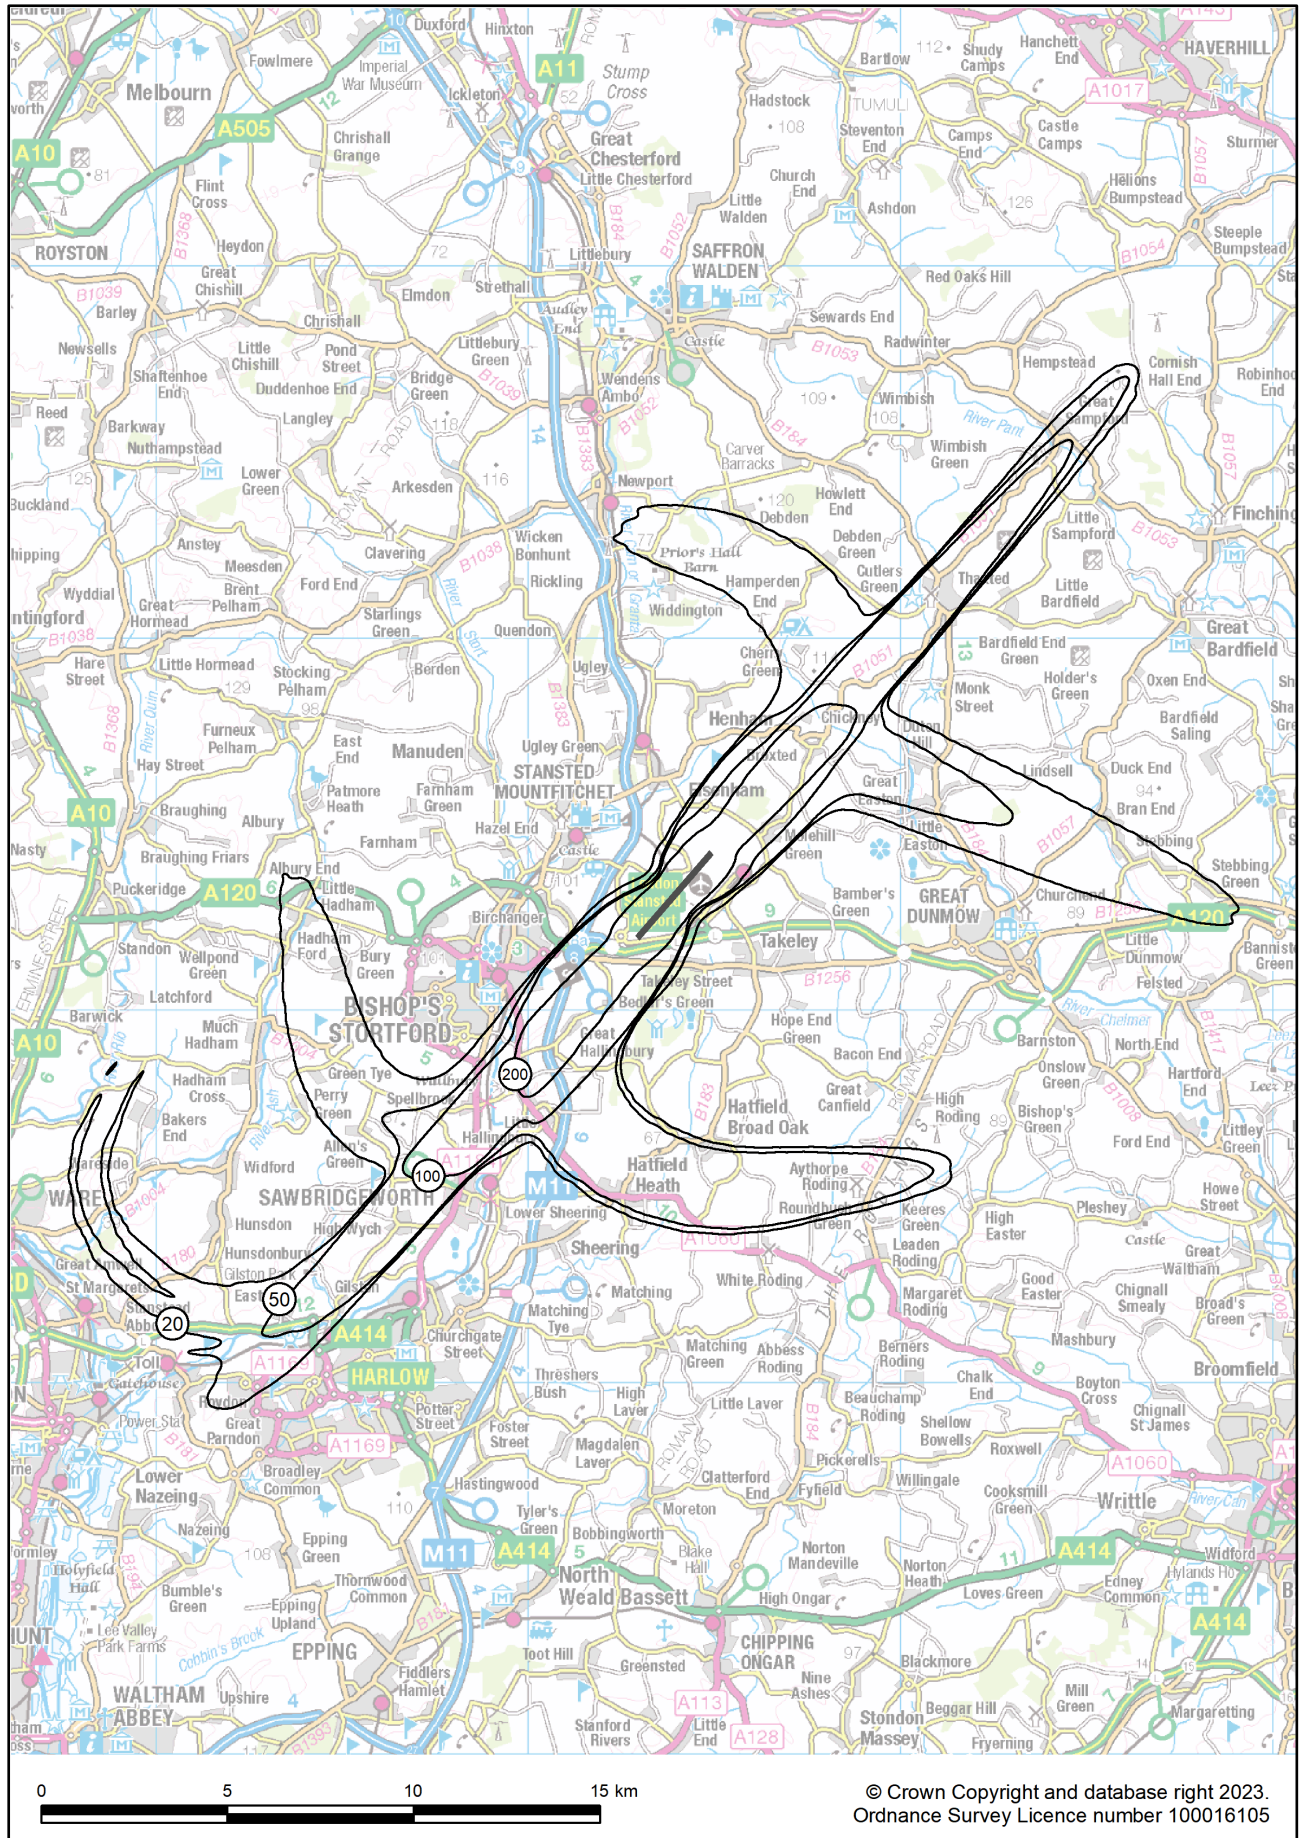


Figure B22 Stansted 2022 summer day standard modal split (72% SW / 28% NE) N65 contours

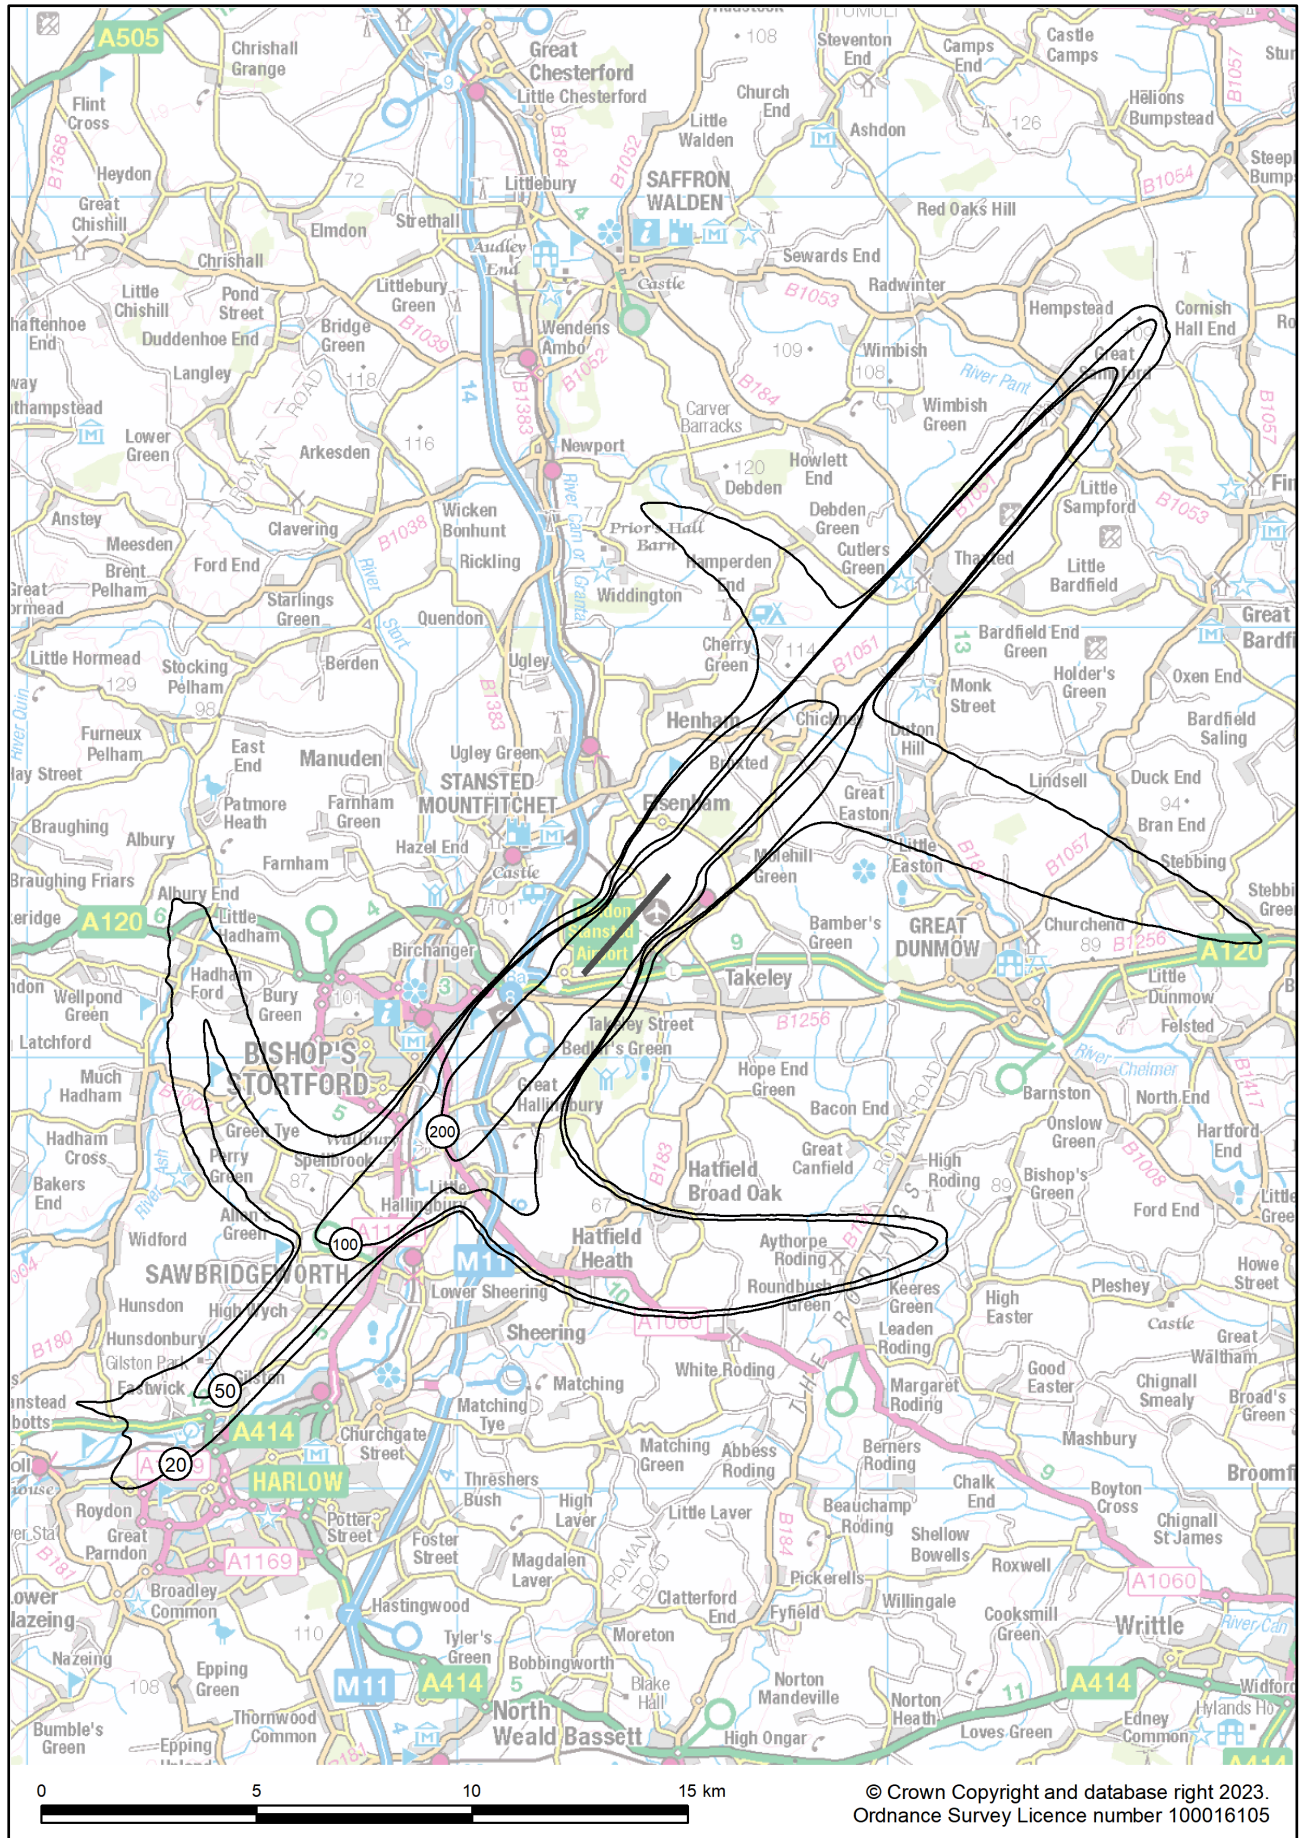

APPENDIX C

Tables

Table C1 Stansted 2021 and 2022 average summer day movements by ANCON type

ANCON type	2021 departures	2021 arrivals	2021 total	2022 departures	2022 arrivals	2022 total	Change departures	Change arrivals	Change total
B733	2.2	1.6	3.8	2.5	2.1	4.7	+0.3	+0.6	+0.8
B736	0.5	0.6	1.0	1.3	1.3	2.7	+0.9	+0.8	+1.6
B738	98.6	98.7	197.3	146.3	133.7	280.0	+47.7	+35.0	+82.7
B738MAX	6.6	6.1	12.8	25.3	22.1	47.4	+18.6	+16.0	+34.6
B739MAX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B744G	0.7	0.6	1.3	0.5	0.4	0.9	-0.2	-0.2	-0.4
B744P	0.3	0.3	0.7	0.4	0.4	0.8	0.0	+0.1	+0.1
B744R	0.2	0.2	0.3	0.2	0.2	0.4	0.0	0.0	+0.1
B747	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0
B748	0.2	0.0	0.2	0.6	0.1	0.7	+0.4	+0.1	+0.5
B757C	0.0	0.0	0.0	0.2	0.1	0.3	+0.2	+0.1	+0.3
B757E	0.9	0.5	1.4	2.1	1.7	3.8	+1.2	+1.3	+2.5
B757P	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B762	0.0	0.0	0.0	0.0	0.1	0.1	0.0	+0.1	+0.1
B763G	1.9	1.9	3.8	1.6	1.5	3.1	-0.3	-0.4	-0.6
B763P	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B764	0.0	0.0	0.1	0.1	0.1	0.3	+0.1	+0.1	+0.2
B772G	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B772R	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B773G	1.8	1.5	3.3	2.5	2.3	4.8	+0.7	+0.8	+1.5
B7810	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	+0.1
B788	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	+0.1
B789	0.0	0.0	0.1	0.1	0.1	0.2	0.0	+0.1	+0.1
BA46	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0
CRJ	0.0	0.0	0.0	0.4	0.4	0.8	+0.4	+0.4	+0.8
CRJ1000	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
CRJ900	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA221	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	+0.1
EA31	0.0	0.0	0.1	0.1	0.1	0.2	+0.1	+0.1	+0.2
EA318	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	+0.1
EA319C	2.6	2.6	5.2	2.8	2.8	5.6	+0.2	+0.2	+0.3
EA319NEO	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA319V	0.1	0.1	0.1	0.3	0.3	0.6	+0.2	+0.2	+0.5
EA320C	3.6	3.6	7.2	12.8	11.6	24.3	+9.2	+8.0	+17.1
EA320NEO	1.4	1.7	3.1	4.6	4.8	9.5	+3.2	+3.1	+6.3
EA320V	1.3	1.2	2.5	7.8	6.3	14.0	+6.5	+5.0	+11.5
EA321C	0.4	0.3	0.7	3.4	2.8	6.2	+3.0	+2.5	+5.5

ANCON type	2021 departures	2021 arrivals	2021 total	2022 departures	2022 arrivals	2022 total	Change departures	Change arrivals	Change total
EA321NEO	0.5	0.5	1.0	2.4	2.5	4.9	+1.9	+2.0	+3.9
EA321V	0.2	0.2	0.5	1.8	1.2	2.9	+1.5	+0.9	+2.5
EA33	0.9	0.9	1.8	1.1	1.1	2.2	+0.2	+0.2	+0.3
EA33NEO	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	-0.1
EA34	0.1	0.0	0.1	0.2	0.2	0.4	+0.1	+0.2	+0.3
EA359	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA38R	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ERJ	2.8	2.7	5.5	3.4	3.4	6.8	+0.7	+0.6	+1.3
ERJ170	0.1	0.1	0.1	0.0	0.0	0.0	-0.1	-0.1	-0.1
ERJ190	0.1	0.2	0.3	0.6	0.5	1.1	+0.4	+0.4	+0.8
EXE3	10.0	10.0	20.0	16.9	16.5	33.4	+6.9	+6.5	+13.4
FK10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
L4P	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
LTT	0.7	0.7	1.4	0.1	0.1	0.1	-0.6	-0.6	-1.3
MD11	1.1	1.2	2.3	1.2	1.2	2.3	0.0	0.0	0.0
MD80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SP	0.2	0.2	0.4	0.3	0.3	0.6	+0.1	+0.1	+0.3
STP	0.1	0.1	0.1	0.1	0.0	0.1	0.0	0.0	0.0
STT	0.6	0.6	1.2	0.6	0.6	1.2	0.0	0.0	0.0
Total	141.0	139.1	280.1	244.8	223.1	467.9	+103.8	+84.0	+187.8
							(+74%)	(+60%)	(+67%)

Note: All numbers are rounded to 1 decimal place. Movement changes have been calculated from unrounded numbers.

Table C2 Stansted 2021 and 2022 average summer night movements by ANCON type

ANCON type	2021 departures	2021 arrivals	2021 total	2022 departures	2022 arrivals	2022 total	Change departures	Change arrivals	Change total
B733	3.5	4.1	7.6	2.0	2.3	4.3	-1.5	-1.8	-3.3
B736	0.1	0.1	0.1	0.1	0.1	0.3	+0.1	+0.1	+0.1
B738	18.2	18.1	36.3	22.9	35.5	58.4	+4.7	+17.4	+22.0
B738MAX	2.0	2.6	4.6	5.2	8.3	13.5	+3.2	+5.7	+8.8
B744G	0.1	0.1	0.1	0.0	0.0	0.1	0.0	0.0	-0.1
B744P	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	+0.1
B744R	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B748	0.3	0.5	0.8	0.0	0.5	0.6	-0.3	+0.1	-0.2
B757C	0.0	0.0	0.0	0.5	0.6	1.1	+0.5	+0.6	+1.1
B757E	1.3	1.7	3.0	0.6	1.1	1.7	-0.6	-0.7	-1.3
B757P	0.1	0.0	0.1	0.1	0.1	0.2	0.0	0.0	+0.1
B762	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
B763G	1.2	1.2	2.3	1.3	1.4	2.7	+0.1	+0.3	+0.4
B773G	0.6	0.9	1.4	0.4	0.7	1.1	-0.2	-0.2	-0.3
B789	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BA46	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
CRJ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA31	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA318	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA319C	0.0	0.0	0.1	0.1	0.0	0.1	0.0	0.0	+0.1
EA319NEO	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA319V	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
EA320C	0.1	0.1	0.2	0.8	2.0	2.8	+0.7	+1.9	+2.6
EA320NEO	0.4	0.1	0.5	0.6	0.4	1.0	+0.2	+0.3	+0.5
EA320V	0.1	0.0	0.1	0.4	1.9	2.3	+0.4	+1.9	+2.2
EA321C	0.0	0.1	0.2	0.9	1.5	2.4	+0.8	+1.4	+2.2
EA321NEO	0.0	0.0	0.0	0.2	0.1	0.3	+0.2	+0.1	+0.3
EA321V	0.0	0.0	0.0	0.0	0.6	0.7	0.0	+0.6	+0.7
EA33	0.0	0.1	0.1	0.1	0.1	0.2	+0.1	+0.1	+0.1
EA34	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
ERJ	0.1	0.1	0.2	0.1	0.2	0.2	0.0	0.0	0.0
ERJ190	0.0	0.0	0.0	0.0	0.1	0.1	0.0	+0.1	+0.1
EXE3	1.9	2.2	4.1	1.5	1.8	3.4	-0.4	-0.3	-0.7
LTT	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	-0.1
MD11	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	+0.1
SP	0.0	0.0	0.0	0.1	0.1	0.2	+0.1	+0.1	+0.2
STP	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0

ANCON type	2021 departures	2021 arrivals	2021 total	2022 departures	2022 arrivals	2022 total	Change departures	Change arrivals	Change total
STT	0.1	0.1	0.2	0.0	0.0	0.1	-0.1	-0.1	-0.2
Total	30.1	32.2	62.3	38.3	59.8	98.0	+8.2	+27.5	+35.7
							(+27%)	(+86%)	(+57%)

Note: All numbers are rounded to 1 decimal place. Movement changes have been calculated from unrounded numbers.

APPENDIX D

ANCON type descriptions

Table D1 ANCON type descriptions

ANCON type	Description
B717	Boeing 717
B727	Boeing 727 (Chapter 2&3)
B732	Boeing 737-200 (Chapter 2&3)
B733	Boeing 737-300/400/500
B736	Boeing 737-600/700
B738MAX	Boeing 737 MAX 8
B739MAX	Boeing 737 MAX 9
B738	Boeing 737-800/900
B747	Boeing 747-100 & 200/300 series (certificated to Chapter 3)
B744G	Boeing 747-400 with General Electric CF6-80F engines
B744P	Boeing 747-400 with Pratt & Whitney PW4000 engines
B744R	Boeing 747-400 with Rolls-Royce RB211 engines
B747SP	Boeing 747SP
B753	Boeing 757-300
B757C	Boeing 757-200 with Rolls-Royce RB211-535C engines
B757E	Boeing 757-200 with Rolls-Royce RB211-535E4/E4B engines
B757P	Boeing 757-200 with Pratt & Whitney PW2037/2040 engines
B762	Boeing 767-200
B763G	Boeing 767-300 with General Electric CF6-80 engines
B763P	Boeing 767-300 with Pratt & Whitney PW4000 engines
B763R	Boeing 767-300 with Rolls-Royce RB211 engines
B764	Boeing 767-400
B772G	Boeing 777-200 with General Electric GE90 engines
B772P	Boeing 777-200 with Pratt & Whitney PW4000 engines
B772R	Boeing 777-200 with Rolls-Royce Trent 800 engines
B773G	Boeing 777-200LR/300ER with General Electric GE90 engines
B773P	Boeing 777-300 with Pratt & Whitney PW4000 engines
B773R	Boeing 777-300 with Rolls-Royce Trent 800 engines
B788	Boeing 787-8
B789	Boeing 787-9
BA46	BAe 146/Avro RJ series
CRJ	Bombardier CRJ100/200 series
CRJ700	Bombardier CRJ700 series

ANCON type	Description
CRJ900	Bombardier CRJ900 series
CRJ1000	Bombardier CRJ1000 series
DC87	McDonnell Douglas DC-8-70 series
DC10	McDonnell Douglas DC-10
EA221	Airbus A220-100
EA223	Airbus A220-300
EA30	Airbus A300
EA31	Airbus A310
EA318	Airbus A318
EA319C	Airbus A319 with CFM56 engines
EA319V	Airbus A319 with IAE V2500 engines
EA320C	Airbus A320 with CFM56 engines
EA320NEO	Airbus A320neo
EA320V	Airbus A320 with IAE V2500 engines
EA321C	Airbus A321 with CFM56 engines
EA321NEO	Airbus A321neo
EA321V	Airbus A321 with IAE V2500 engines
EA33	Airbus A330
EA34	Airbus A340-200/300
EA346	Airbus A340-500/600
EA359	Airbus A350-900
EA38GP	Airbus A380 with Engine Alliance GP7000 engines
EA38R	Airbus A380 with Rolls-Royce Trent 900 engines
ERJ	Embraer ERJ 135/145
ERJ170	Embraer E-170/175
ERJ190	Embraer E-190/195
EXE2	Chapter 2 executive jets
EXE3	Chapter 3 executive jets
FK10	Fokker 70/100
L101	Lockheed L-1011 TriStar
L4P	Large four-engine propeller
LTT	Large twin-turboprop
MD11	McDonnell Douglas MD-11

ANCON type	Description
MD80	McDonnell Douglas MD-80 series
SP	Single propeller
STP	Small twin-piston
STT	Small twin-turboprop
TU54	Tupolev Tu-154

Glossary

Glossary	
AIP	Aeronautical Information Publication
AMSL	Above mean sea level
ANCON	The UK civil aircraft noise contour model, developed and maintained by ERCD.
ATC	Air Traffic Control
CAA	Civil Aviation Authority
dB	Decibel units describing sound level or changes of sound level.
dBA	Units of sound level on the A-weighted scale, which incorporates a frequency weighting approximating the characteristics of human hearing.
DfT	Department for Transport (UK Government)
ERCD	Environmental Research and Consultancy Department
ICAO	International Civil Aviation Organization
L_{Aeq}	Equivalent sound level of aircraft noise in dBA, often called 'equivalent continuous sound level'.
$L_{Aeq,16h}$	Equivalent A-weighted sound level of aircraft noise for the 16-hour daytime period (07:00-23:00 local time)
$L_{Aeq,8h}$	Equivalent A-weighted sound level of aircraft noise for the 8-hour night-time period (23:00-07:00 local time)
L_{Amax}	A-weighted maximum sound level of a noise event.
LOAEL	Lowest Observed Adverse Effect Level
mppa	million passengers per annum
N65	Number of aircraft noise events exceeding 65 dB L_{Amax} .
NPD	Noise-Power-Distance
NPR	Noise Preferential Route
NTK	Noise and Track Keeping monitoring system
OS	Ordnance Survey, the national mapping agency of Great Britain

Glossary	
SEL	Sound Exposure Level – the steady noise level, which over a period of one second contains the same sound energy as the whole aircraft noise event. It is equivalent to the L_{Aeq} of the noise event normalised to one second.
SID	Standard Instrument Departure
STAL	Stansted Airport Limited